



STRUENING BEARINGS CO., LTD.

ROD END 桿端軸承 · 球面軸承 & SPHERICAL BEARINGS

CONTENTS

目錄

公司簡介 COMPANY INTRODUCTION



桿端軸承 ROD END BEARINGS

	PHS Series	Female Type	06
	POS Series	Male Type	07
	NHS Series	Female Type	08
	NOS Series	Male Type	09
	MHS Series	Female Type	10
	MOS Series	Male Type	11
	SI_E Series	Female Type	12
	SA_E Series	Male Type	13
	RBT Series	Female Type	14
	RBM Series	Male Type	15

重力耐磨型桿端軸承

HEAVY LOAD ROD END BEARINGS

	HKF Series	Female Type	16
	HKM Series	Male Type	17

鋁合金桿端軸承

ALLUMINUM ROD END BEARINGS

	AXF Series	Female Type	18
	AXM Series	Male Type	19

球面軸承

SPHERICAL BEARINGS

	PB/PB_T/PBN Series	20
	PC Series	21
	GE Series	22
	GE_C Series	23

連球軸承

LINK BALL BEARINGS

	RBL Series	24
	BI Series	25
	BL Series	26
	YL Series	27

浮動接頭軸承

FLOATING JOINT BEARINGS

	FJ Series	28
--	-----------	----

特殊規格客製品

OEM PRODUCTS



附錄

INDEX

單位轉換表、公差表等

Conversion Factors, Tolerances Tables	31
---------------------------------------	----

COMPANY INTRODUCTION

公司簡介

本公司創立於1989年，專業生產桿端軸承及球面軸承，擁有各式金屬加工機械，富彈性的生產方式，可充分滿足客戶需求。我們的產品種類形式多，規格齊全，生產各系列的標準規格，也為客戶承製專門用途的特殊樣式。優良的品質、迅速的交期及物超所值的價格是我們的信念，本公司產品行銷世界主要工業國家，品質深獲國內外客戶一致肯定與信賴，期待為您提供最好的服務。

The Struening Bearings Co., Ltd. (S.B. Rod Ends) was established in 1989, mainly in manufacturing rod end and spherical bearings. Our firm plays as a leading role on bearing manufacture technologies in Taiwan, and specializes in rod end bearings, spherical bearings, link ball bearings and rod end linkages. We not only have automatized production, precise assembly, stable and high quality products, but also provide timely delivery of quality products at very competitive market prices.

產品開發

RESEARCH AND DEVELOPMENT ABILITY

產品開發能力是我們的核心競爭力，充分的能力可為客戶開發各種萬向軸承，提供各種解決方案，協助客戶克服挑戰。

The core competence of our corporation is Research and Development. R&D ability has been applied to manufacture various products. Our goals of expanding mainly focus on the connecting engineering, rod end linking solutions to industrial usages and commercial consumers, and helping clients to solve the difficulties in joint connecting.

自動化精密生產設備

AUTOMATIC MANUFACTURING SYSTEM

- 精密自動化CNC/NC 車床
- 自動化機器人生產系統
- 精密CNC/NC 磨床
- 高效能油壓機
- 精密組裝模具
- Auto-feed and auto-cutting CNC/NC lathes
- Automatic Robot manufacturing systems
- Precise CNC/NC grinding machines
- High performance hydraulic press machines
- Precise assembling molds

3Q品質保證

3Q SYSTEM QUALITY ASSURANCES

通過ISO9001品質認證，致力追求品質的提昇。

除此之外，我們也推行3Q品質保證：

- 設計品質(Assurance of Design Quality)
在設計階段評估產品功能及性能
- 製造品質(Assurance of Manufacturing Quality)
製造階段確保產品品質
- 客戶品質(Assurance of Customer Quality)
以優質的產品及服務，滿足客戶的需求

Sturening Bearings Co. Ltd. has been qualified the ISO 9001 certificate since 2006. Meanwhile, our quality assurance system is the fundamental basis. This consists of three main parts:

- Assurance of Design Quality (ADQ)
emphasizes on function and performance review.
- Assurance of Manufacturing Quality (AMQ)
includes well manufacturing and quality control process.
- Assurance of Customer Quality (ACQ)
centered on technical supports and satisfactions.



PHS
series

桿端軸承
ROD END BEARING




POS
series

桿端軸承
ROD END BEARING



- 嵌入組合型
特殊結構設計・鋼珠滑順・附黃油咀
- 材質
・主體：中碳鋼 S45C・鍍鋅 (Cr3+)
・鋼珠：鉻鉬軸承鋼 SUJ-2・熱處理 HRC 56°±2・鍍硬鉻
・外框：合金鋼 (PHS5~PHS25, PHS3/16~PHS1")
・外框：碳鋼 + 合金鋼 (PHS30)
- 間隙 (mm)
徑向間隙值：小於 0.035
軸向間隙值：小於 0.1

- Grease Fitting Type
An unique race structure design. Low clearance.
Performing well in durability. A grease fitting.
- MATERIALS
・BODY:Medium Carbon Steel S45C, Zinc Coated (Cr3+)
・BALL:Bearing Steel SUJ-2, Heat Treated HRC 56°±2,Hard Chrome Plated
・RACE: Copper Alloy (PHS5~PHS25, PHS3/16~PHS1")
・RACE: Carbon Steel+Copper Alloy (PHS30)
- CLEARANCE(Unit: mm)
Radial Clearance:0.035 or less
Axial Clearance:0.1 or less

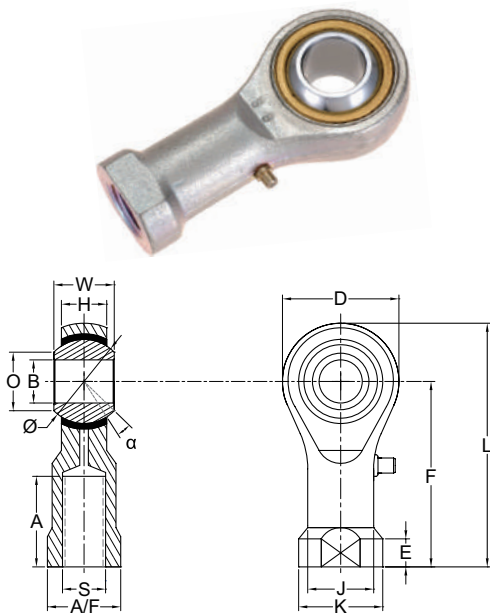


公制尺寸 / DIMENSIONS IN METRIC mm																	
型 號 Model No.	B H7	W +0 -0.1	D	L	O	H ±0.1	A +2 -0	F	J	K	E	A/F +0 -0.2	 Thread S	旋角 α	球徑 Ball Dia. Ø	徑向荷重 Radial S. load (kgf)	重量 Weight (g)
PHS 5 R/L	5	8	17	36.5	7.7	6	12	28	9	11	5	9	5x0.8	13	11.11	560	18
PHS 6 R/L	6	9	19	39	8.9	6.7	14	29.5	10	13	5	11	6x1.0	13	12.7	690	25
PHS 8 RF/LF PHS 8 R/L	8	12	23.5	47.5	10.4	9	17	36	13	16	5	14	8x1.0 8x1.25	13	15.88	980	48
PHS 10 RF/LF PHS 10 R/L	10	14	27	58	12.9	10.5	21	44.5	15	19	7	17	10x1.25 10x1.5	13	19.05	1320	77
PHS 12 RF/LF PHS 12 R/L	12	16	32	65	15.4	12	24	49	18	22	7	19	12x1.25 12x1.75	13	22.23	1670	123
PHS 14 RF/LF PHS 14 R/L	14	19	36	75	16.8	14	27	57	20	25	8	21.5	14x1.5 14x2.0	15	25.4	2060	168
PHS 16 RF/LF PHS 16 R/L	16	21	39	84	19.3	15	33	64.5	22	27	8	22	16x1.5 16x2.0	15	28.58	2500	212
PHS 18 R/L	18	23	43	91.5	21.8	17	36	70	25	31	10	27	18x1.5	15	31.75	2940	302
PHS 20 R/L	20	25	47	100	24.3	18	40	76.5	28	34	10	30	20x1.5	15	34.93	3430	380
PHS 22 R/L	22	28	50	108	25.9	20	43	83	30	37	12	32	22x1.5	15	38.1	4120	490
PHS 25 R/L	25	31	56	120	29.6	22	48	92	34	42	12	36	24x2.0	15	42.85	7240	665
PHS 30 R/L	30	37	68	145	34.8	26	56	111	40	50	15	41	30x2.0	15	50.8	9210	1110

英制尺寸 / DIMENSIONS IN INCHES																	
型 號 Model No.	B H7	W +0 -0.004	D	L	O	H	A +0.08 -0	F	J	K	E	A/F +0 -0.008	Thread S	旋角 α	球徑 Ball Dia. Ø	徑向荷重 Radial S. load (Lbs)	重量 Weight (Lbs)
PHS3/16 R/L	0.1875	0.312	0.669	1.437	0.303	0.236	0.472	1.102	0.354	0.433	0.157	0.354	UNF3/16-32	13	0.437	1230	0.04
PHS 1/4 R/L	0.2500	0.375	0.748	1.535	0.350	0.264	0.551	1.161	0.394	0.512	0.197	0.433	UNF 1/4-28	13	0.500	1520	0.06
PHS 5/16 R/L	0.3125	0.437	0.925	1.870	0.409	0.354	0.669	1.417	0.512	0.630	0.197	0.551	UNF 5/16-24	13	0.625	2160	0.11
PHS 3/8 R/L	0.3750	0.500	1.063	2.283	0.508	0.433	0.827	1.752	0.590	0.748	0.256	0.669	UNF 3/8-24	13	0.750	2910	0.18
PHS 7/16 R/L	0.4375	0.500	1.063	2.283	0.508	0.433	0.827	1.752	0.590	0.748	0.256	0.669	UNF 7/16-20	13	0.750	2910	0.18
PHS 1/2 R/L	0.5000	0.625	1.259	2.559	0.606	0.472	0.945	1.929	0.709	0.866	0.256	0.748	UNF 1/2-20	13	0.875	3680	0.27
PHS 5/8 R/L	0.6250	0.750	1.535	3.307	0.760	0.590	1.299	2.539	0.866	1.063	0.315	0.866	UNF 5/8-18	15	1.125	5510	0.47
PHS 3/4 R/L	0.7500	0.875	1.692	3.602	0.858	0.669	1.417	2.756	0.984	1.220	0.394	1.063	UNF 3/4-16	15	1.250	7560	0.67
PHS 1 R/L	1.0000	1.220	2.205	4.724	1.165	0.866	1.890	3.622	1.339	1.654	0.472	1.417	UNF 1-12	15	1.687	15960	1.47

- 嵌入組合型
特殊結構設計・鋼珠滑順・附黃油咀
- 材質
・主體：中碳鋼 S45C・鍛造・表面鍍鋅 (Cr3+)
・鋼珠：鉻鉬軸承鋼 SUJ-2・熱處理 HRC 56°±2・鍍硬鉻
・外框：合金鋼 (POS5~POS25, POS3/16~POS1")
・外框：碳鋼 + 合金鋼 (POS30)
- 間隙 (mm)
徑向間隙值：小於 0.035
軸向間隙值：小於 0.1

- Grease Fitting Type
An unique race structure design. Low clearance.
Performing well in durability. A grease fitting.
- MATERIALS
・BODY:Medium Carbon Steel S45C, Forged, Zinc Coated (Cr3+)
・BALL:Bearing Steel SUJ-2, Heat Treated HRC 56°±2,Hard Chrome Plated
・RACE: Copper Alloy (POS5~PHS25, POS3/16~POS1")
・RACE: Carbon Steel+Copper Alloy (POS30)
- CLEARANCE(Unit: mm)
Radial Clearance:0.035 or less
Axial Clearance:0.1 or less

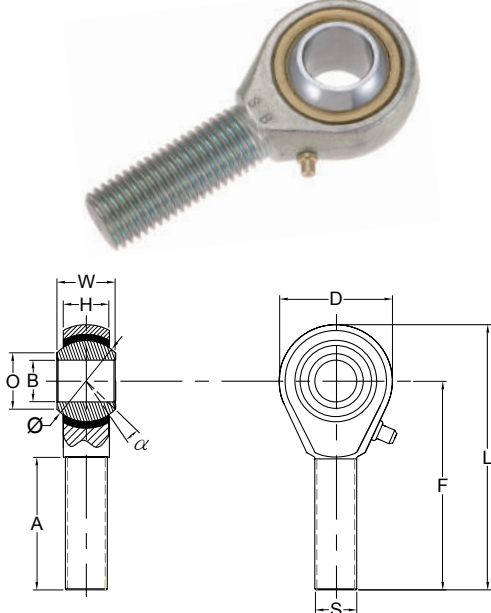

公制尺寸 / DIMENSIONS IN METRIC mm													
型 號 Model No.	B H7	W +0 -0.1	D	L	O	H ± 0.1	A +2 -0	F	Thread S	旋角 α	球徑 Ball Dia. Ø	徑向荷重 Radial S. load (kgf)	重量 Weight (g)
POS 5 R/L	5	8	17	43.5	7.7	6	22	35	5x0.8	13	11.11	340	14
POS 6 R/L	6	9	19	47.5	8.9	6.7	24	38	6x1.0	13	12.7	480	21
POS 8 RF/LF POS 8 R/L	8	12	23.5	55.5	10.4	9	26	44	8x1.0 8x1.25	13	15.88	680	41
POS 10 RF/LF POS 10 R/L	10	14	27	63.5	12.9	10.5	30	50	10x1.25 10x1.5	13	19.05	1070	65
POS 12 RF/LF POS 12 R/L	12	16	32	72	15.4	12	35	56	12x1.25 12x1.75	13	22.23	1650	100
POS 14 RF/LF POS 14 R/L	14	19	36	81	16.8	14	37	63	14x1.5 14x2.0	15	25.4	2040	146
POS 16 RF/LF POS 16 R/L	16	21	39	91.5	19.3	15	43	72	16x1.5 16x2.0	15	28.58	2470	195
POS 18 R/L	18	23	44	97	21.8	17	46	75	18x1.5	15	31.75	2910	270
POS 20 R/L	20	25	47	104	24.3	18	48	80.5	20x1.5	15	34.93	3390	345
POS 22 R/L	22	28	50	109	25.9	20	51	84	22x1.5	15	38.1	4070	455
POS 25 R/L	25	31	56	122	29.6	22	57	94	24x2.0	15	42.85	7170	590
POS 30 R/L	30	37	68	146.5	34.8	26	66	112.5	30x2.0	15	50.8	9120	1060

英制尺寸 / DIMENSIONS IN INCHES													
型 號 Model No.	B H7	W +0 -0.004	D	L	O	H ±0.004	A +0.08 -0	F	Thread S	旋角 α	球徑 Ball Dia. Ø	徑向荷重 Radial S. load (Lbs)	重量 Weight (Lbs)
POS 3/16 R/L	0.1875	0.312	0.669	1.713	0.303	0.236	0.866	1.378	UNF 3/16-32	13	0.437	750	0.03
POS 1/4 R/L	0.2500	0.375	0.748	1.870	0.350	0.264	0.945	1.496	UNF 1/4-28	13	0.500	1060	0.05
POS 5/16 R/L	0.3125	0.437	0.925	2.185	0.409	0.354	1.024	1.732	UNF 5/16-24	13	0.625	1500	0.09
POS 3/8 R/L	0.3750	0.500	1.063	2.500	0.508	0.413	1.181	1.969	UNF 3/8-24	13	0.750	2360	0.14
POS 7/16 R/L	0.4375	0.500	1.063	2.500	0.508	0.413	1.181	1.969	UNF 7/16-20	13	0.750	2360	0.14
POS 1/2 R/L	0.5000	0.625	1.260	2.835	0.606	0.472	1.378	2.205	UNF 1/2-20	13	0.875	3640	0.22
POS 5/8 R/L	0.6250	0.750	1.535	3.602	0.760	0.591	1.693	2.835	UNF 5/8-18	15	1.125	5450	0.43
POS 3/4 R/L	0.7500	0.875	1.732	3.819	0.858	0.669	1.811	2.953	UNF 3/4-16	15	1.250	7470	0.60
POS 1 R/L	1.0000	1.220	2.205	4.803	1.165	0.866	2.244	3.701	UNF 1-12	15	1.687	15810	1.30

NHS

series

桿端軸承 ROD END BEARING



■鐵氟龍自潤耐磨型
採用超耐磨襯套材料 (PTFE) · 免給油耐磨設計 · 精密無間隙 · 必須微調間距之場所最合適 ·


■材質
·主體：中碳鋼 S45C · 鍛造 · 表面鍍鋅 (Cr3+) · NHS3、NHS4：碳鋼鑄造
·鋼珠：鉻鉬軸承鋼 SUJ-2 · 熱處理 HRC 56°±2 · 鍍硬鉻
·襯墊：鐵氟龍銅網 (PTFE)- 柔軟堅韌銅網和氟樹脂塗佈組成

■間隙 (mm)
徑向間隙值：小於 0.035
軸向間隙值：小於 0.05

■SELF-LUBRICATING TYPE
Highly wear-resisting PTFE liner. Well made with low clearance.
Suitable for precision applications.

■MATERIALS
·BODY:Medium Carbon Steel S45C, Forged, Zinc Coated (Cr3+) for NHS3
For NHS3 and NHS4: Carbon Steel by Casting.
·BALL: Bearing Steel SUJ-2, Heat Treated HRC56°±2, Hard Chrome Plated
·LINER: PTFE, Strong & flexible bronze mesh spread with fluorine resin

■CLEARANCE(Unit: mm)
Radial Clearance:0.035 or less
Axial Clearance:0.05 or less

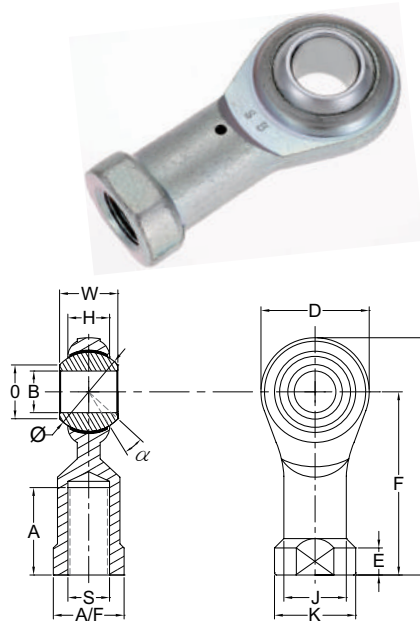

公制尺寸 / DIMENSIONS IN METRIC mm

型 號 Model No.	B H7	W +0 -0.1	D	L	O	H ±0.1	A +2 -0	F	J	K	E	A/F +0 -0.2	Thread S	旋角 α	球徑 Ball Dia. Ø	徑向荷重 Radial S. load (kgf)	重量 Weight (g)
NHS 3 R/L	3	6	14	28.5	7.4	4	8	21.5	6.5	8	3	7	3x0.5	13	9.3	180	8
NHS 4 R/L	4	7	14	31.5	7.6	4.2	10	24.5	8	9.5	4	8	4x0.7	13	10.32	220	11
NHS 5 R/L	5	8	17	36.5	7.7	5.2	12	28	9	11	4	9	5x0.8	13	11.11	390	16
NHS 6 R/L	6	9	19	39	8.9	6	14	29.5	10	13	5	11	6x1.0	13	12.7	500	24
NHS 8 RF/LF NHS 8 R/L	8	12	23.5	47.5	10.4	8	17	36	13	16	5	14	8x1.0 8x1.25	13	15.88	740	41
NHS 10 RF/LF NHS 10 R/L	10	14	27	58	12.9	10.5	21	44.5	15	19	7	17	10x1.25 10x1.5	13	19.05	940	70
NHS 12 RF/LF NHS 12 R/L	12	16	32	65	15.4	11.5	24	49	18	22	7	19	12x1.25 12x1.75	13	22.23	1100	105
NHS 14 RF/LF NHS 14 R/L	14	19	36	75	16.8	13.5	27	57	20	25	8	21	14x1.5 14x2.0	15	25.4	1520	150
NHS 16 RF/LF NHS 16 R/L	16	21	39	84	19.3	13.8	33	64.5	22	27	8	22	16x1.5 16x2.0	15	28.58	2020	180
NHS 18 R/L	18	23	43	91.5	21.8	15	36	70	25	31	10	27	18x1.5	15	31.75	2520	255
NHS 20 R/L	20	25	47	100	24.3	16.8	40	76.5	28	34	10	30	20x1.5	15	34.93	2780	340
NHS 22 R/L	22	28	50	108	25.9	18.2	43	83	30	37	12	32	22x1.5	15	38.1	3590	420
NHS 25 R/L	25	31	56	120	29.6	21	48	92	34	42	12	36	24x2.0	15	42.85	5430	590
NHS 30 R/L	30	37	68	145	34.8	23.6	58	111	40	50	15	41	30x2.0	15	50.8	6910	950

英制尺寸 / DIMENSIONS IN INCHES

型 號 Model No.	B H7	W +0 -0.004	D	L	O	H +0.004 -0.016	A +0.08 -0	F	J	K	E	A/F +0 -0.008	Thread S	旋角 α	球徑 Ball Dia. Ø	徑向荷重 Radial S. load (Lbs)	重量 Weight (Lbs)
NHS 3/16 R/L	0.1875	0.312	0.669	1.437	0.303	0.205	0.472	1.102	0.354	0.433	0.157	0.354	UNF 3/16-32	13	0.437	860	0.04
NHS 1/4 R/L	0.2500	0.375	0.748	1.535	0.350	0.236	0.551	1.161	0.394	0.512	0.197	0.433	UNF 1/4-28	13	0.500	1100	0.05
NHS 5/16 R/L	0.3125	0.437	0.925	1.870	0.409	0.315	0.669	1.417	0.512	0.630	0.197	0.551	UNF 5/16-24	13	0.625	1630	0.09
NHS 3/8 R/L	0.3750	0.500	1.063	2.283	0.508	0.413	0.827	1.752	0.591	0.748	0.276	0.669	UNF 3/8-24	13	0.750	2070	0.15
NHS 7/16 R/L	0.4375	0.500	1.063	2.283	0.508	0.413	0.827	1.752	0.591	0.748	0.276	0.669	UNF 7/16-20	13	0.750	2070	0.15
NHS 1/2 R/L	0.5000	0.625	1.260	2.559	0.606	0.453	0.945	1.929	0.709	0.866	0.276	0.748	UNF 1/2-20	13	0.875	2430	0.23
NHS 5/8 R/L	0.6250	0.750	1.535	3.307	0.760	0.543	1.299	2.539	0.866	1.063	0.315	0.866	UNF 5/8-18	15	1.125	4450	0.40
NHS 3/4 R/L	0.7500	0.875	1.693	3.602	0.858	0.591	1.417	2.756	0.984	1.220	0.394	1.063	UNF 3/4-16	15	1.250	6130	0.56
NHS 1 R/L	1.0000	1.220	2.205	4.724	1.165	0.827	1.890	3.622	1.339	1.654	0.472	1.417	UNF 1-12	15	1.687	11970	1.30

NOS

series

桿端軸承 ROD END BEARING



■鐵氟龍自潤耐磨型
採用超耐磨襯套材料 (PTFE) · 免給油耐磨設計 · 精密無間隙 · 必須微調間距之場所最合適 ·


■材質
·主體：中碳鋼 S45C · 鍍鋅 (Cr3+) ; NOS3、NOS4：碳鋼 S20C 鑄造
·鋼珠：鉻鉬軸承鋼 SUJ-2 · 熱處理 HRC 56°±2 · 鍍硬鉻
·襯墊：鐵氟龍銅網 (PTFE)- 柔軟堅韌銅網和氟樹脂塗佈組成

■間隙 (mm)
徑向間隙值：小於 0.035
軸向間隙值：小於 0.05

■SELF-LUBRICATING TYPE
Highly wear-resisting PTFE liner. Well made with low clearance.
Suitable for precision applications.

■MATERIALS
·BODY:Medium Carbon Steel S45C, Zinc Coated (Cr3+).
For NOS3 and NOS4: Carbon Steel by Casting.
·BALL: Bearing Steel SUJ-2, Heat Treated HRC 56°±2, Hard Chrome Plated
·LINER: PTFE, Strong & flexible bronze mesh spread with fluorine resin

■CLEARANCE(Unit: mm)
Radial Clearance:0.035 or less
Axial Clearance:0.05 or less

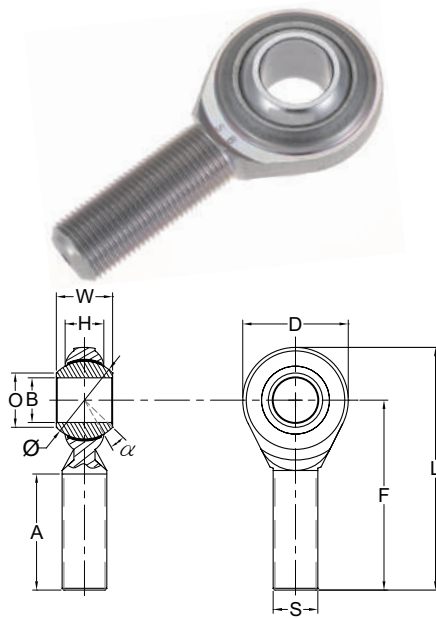

公制尺寸 / DIMENSIONS IN METRIC mm

型 號 Model No.	B H7	W +0 -0.1	D	L	O	H +0.1 -0.4	A +2 -0	F	Thread S	旋角 α	球徑 Ball Dia. Ø	徑向荷重 Radial S. load (kgf)	重量 Weight (g)
NOS 3 R/L	3	6	14	32	7.3	4.5	13	25	3x0.5	13	9.3	220	8
NOS 4 R/L	4	7	14	37	7.6	5.3	17	30	4x0.7	13	10.32	220	8
NOS 5 R/L	5	8	17	43.5	7.7	5.5	22	35	5x0.8	13	11.11	340	13
NOS 6 R/L	6	9	19	47.5	8.9	6	24	38	6x1.0	13	12.7	490	17
NOS 8 RF/LF NOS 8 R/L	8	12	23.5	55.5	10.4	8	26	44	8x1.0 8x1.25	13	15.88	690	33
NOS 10 RF/LF NOS 10 R/L	10	14	27	63.5	12.9	10	30	50	10x1.25 10x1.5	13	19.05	940	54
NOS 12 RF/LF NOS 12 R/L	12	16	32	72	15.4	11	35	56	12x1.25 12x1.75	13	22.23	1100	85
NOS 14 RF/LF NOS 14 R/L	14	19	36	81	16.8	12.5	37	63	14x1.5 14x2.0	15	25.4	1520	125
NOS 16 RF/LF NOS 16 R/L	16	21	39	91.5	19.3	13.5	43	72	16x1.5 16x2.0	15	28.58	2020	170
NOS 18 R/L	18	23	44	97	21.8	15	46	75	18x1.5	15	31.75	2520	230
NOS 20 R/L	20	25	47	104	24.3	17	48	80.5	20x1.5	15	34.93	2780	305
NOS 22 R/L	22	28	50	109	25.9	18	51	84	22x1.5	15	38.1	3590	385
NOS 25 R/L	25	31	56	122	29.6	20	57	94	24x2.0	15	42.85	5430	515
NOS 30 R/L	30	37	68	146.5	34.8	23.5	66	112.5	30x2.0	15	50.8	6910	885

英制尺寸 / DIMENSIONS IN INCHES

型 號 Model No.	B H7	W +0 -0.004	D	L	O	H + 0.004 -0.016	A +0.08 -0	F	Thread S	旋角 α	球徑 Ball Dia. Ø	徑向荷重 Radial S. load (Lbs)	重量 Weight (Lbs)
NOS 3/16 R/L	0.1875	0.312	0.669	1.713	0.303	0.217	0.866	1.378	UNF 3/16-32	13	0.4374	750	0.03
NOS 1/4 R/L	0.2500	0.375	0.748	1.870	0.350	0.236	0.945	1.496	UNF 1/4-28	13	0.500	1080	0.04
NOS 5/16 R/L	0.3125	0.437	0.925	2.185	0.409	0.315	1.024	1.732	UNF 5/16-24	13	0.625	1520	0.07
NOS 3/8 R/L	0.3750	0.500	1.063	2.500	0.508	0.394	1.181	1.969	UNF 3/8-24	13	0.750	2070	0.12
NOS 7/16 R/L	0.4375	0.500	1.063	2.500	0.508	0.394	1.181	1.969	UNF 7/16-20	13	0.750	2070	0.12
NOS 1/2 R/L	0.5000	0.625	1.260	2.835	0.606	0.433	1.378	2.205	UNF 1/2-20	13	0.875	2430	0.19
NOS 5/8 R/L	0.6250	0.750	1.535	3.602	0.760	0.512	1.693	2.835	UNF 5/8-18	15	1.125	4450	0.38
NOS 3/4 R/L	0.7500	0.875	1.693	3.819	0.858	0.590	1.811	2.953	UNF 3/4-16	15	1.250	6130	0.51
NOS 1 R/L	1.0000	1.220	2.205	4.803	1.165	0.787	2.244	3.701	UNF 1-12	15	1.687	11970	1.34

MHS

series

桿端軸承 ROD END BEARING



■射出密合型

特殊超耐磨複合材料襯套，自潤圓滑，免給油，
長時間運轉不易磨損，使用壽命更長

■材質

- 主體：中碳鋼 S45C ·鍛造 ·表面鍍鋅 (Cr3+)
- 鋼珠：鉻鉬軸承鋼 SUJ-2 ·熱處理 HRC56[±]2 ·鍍硬鉻
- 襯墊：特殊耐磨複合材料或 POM 工程塑膠

■間隙 (mm)

徑向間隙值：小於 0.035
軸向間隙值：小於 0.05

■SELF-LUBRICATING TYPE


The special liner material highers lubricating performance,
decreases abrasion and extends a bearing lifespan.

■MATERIALS

- BODY:Medium Carbon Steel S45C, Forged, Zinc Coated(Cr3+)
- BALL:Bearing Steel SUJ-2, Heat Treated HRC 56[±]2,Hard Chrome Plated
- LINER: Special Reinforce Nylon or P.O.M. Materials

■CLEARANCE (Unit: mm)

Radial Clearance:0.035 or less
Axial Clearance:0.05 or less

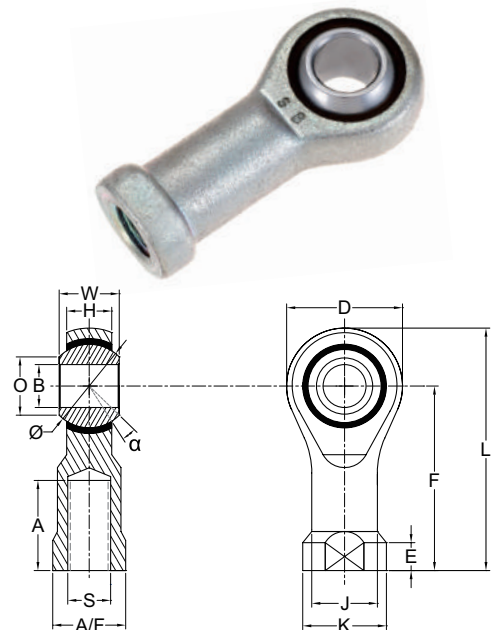

公制尺寸 / DIMENSIONS IN METRIC mm

型 號 Model No.	B H7	W +0 -0.1	D	L	O	H +0 -0.1	A +2 -0	F	J	K	E	A/F +0 -0.2	Thread S	旋角 α	球徑 Ball Dia. Ø	徑向荷重 Radial S. load (kgf)	重量 Weight (g)
MHS 5 R/L	5	8	17	36.5	7.7	6	12	28	9	11	4	9	5x0.8	13	11.11	560	18
MHS 6 R/L	6	9	19	39	8.9	6.7	14	29.5	10	13	5	11	6x1.0	13	12.7	690	27
MHS 8 RF/LF MHS 8 R/L	8	12	23.5	47.5	10.4	9	17	36	13	16	5	14	8x1.0 8x1.25	13	15.88	980	48
MHS 10 RF/LF MHS 10 R/L	10	14	27	58	12.9	10.5	21	44.5	15	19	7	17	10x1.25 10x1.5	13	19.05	1320	75
MHS 12 RF/LF MHS 12 R/L	12	16	32	65	15.4	12	24	49	18	22	7	19	12x1.25 12x1.75	13	22.23	1670	120
MHS 14 RF/LF MHS 14 R/L	14	19	36	75	16.8	14	27	57	20	25	8	21	14x1.5 14x2.0	15	25.4	2060	170
MHS 16 RF/LF MHS 16 R/L	16	21	39	84	19.3	15	33	64.5	22	27	8	22	16x1.5 16x2.0	15	28.58	2500	200
MHS 18 R/L	18	23	43	91.5	21.8	17	36	70	25	31	10	27	18x1.5	15	31.75	2940	305
MHS 20 R/L	20	25	47	100	24.3	18	40	76.5	28	34	10	30	20x1.5	15	34.93	3430	380

英制尺寸 / DIMENSIONS IN INCHES

型 號 Model No.	B H7	W +0 -0.004	D	L	O	H +/- 0.004	A +0.08 -0	F	J	K	E	A/F +0 -0.008	Thread S	旋角 α	球徑 Ball Dia. Ø	徑向荷重 Radial S. load (Lbs)	重量 Weight (Lbs)
MHS 1/4 R/L	0.2500	0.375	0.748	1.535	0.350	0.264	0.551	1.161	0.394	0.512	0.197	0.433	UNF 1/4-28	13	0.500	1520	0.06
MHS 5/16 R/L	0.3125	0.437	0.925	1.870	0.409	0.354	0.669	1.417	0.512	0.630	0.197	0.551	UNF 5/16-24	13	0.625	2160	0.11
MHS 3/8 R/L	0.3750	0.500	1.063	2.283	0.508	0.413	0.827	1.752	0.591	0.748	0.276	0.669	UNF 3/8-24	13	0.750	2910	0.18
MHS 7/16 R/L	0.4375	0.500	1.063	2.283	0.508	0.413	0.827	1.752	0.591	0.748	0.276	0.669	UNF 7/16-20	13	0.750	2910	0.18
MHS 1/2 R/L	0.5000	0.625	1.260	2.559	0.606	0.472	0.945	1.929	0.709	0.866	0.276	0.748	UNF 1/2-20	13	0.875	3680	0.27
MHS 5/8 R/L	0.6250	0.750	1.535	3.307	0.760	0.591	1.299	2.539	0.866	1.063	0.315	0.866	UNF 5/8-18	15	1.125	5510	0.47
MHS 3/4 R/L	0.7500	0.875	1.693	3.602	0.858	0.669	1.417	2.756	0.984	1.220	0.394	1.063	UNF 3/4-16	15	1.250	7560	0.67

MOS

series

桿端軸承 ROD END BEARING



■射出密合型

特殊超耐磨複合材料襯套，自潤圓滑，免給油，
長時間運轉不易磨損，使用壽命更長

■材質

- 主體：中碳鋼 S45C ·鍛造 ·表面鍍鋅 (Cr3+)
- 鋼珠：鉻鉬軸承鋼 SUJ-2 ·熱處理 HRC 56[±]2 ·鍍硬鉻
- 襯墊：特殊耐磨尼龍複合材料或 POM 工程塑膠

■間隙 (mm)

徑向間隙值：小於 0.035
軸向間隙值：小於 0.05

■SELF-LUBRICATING TYPE


The special liner material highers lubricating performance,
decreases abrasion and extends a bearing lifespan.

■MATERIALS

- BODY:Medium Carbon Steel S45C, Forged, Zinc Coated(Cr3+)
- BALL:Bearing Steel SUJ-2, Heat Treated HRC 56[±]2,Hard Chrome Plated
- LINER: Special Reinforce Nylon or P.O.M. Materials

■CLEARANCE (Unit: mm)

Radial Clearance:0.035 or less
Axial Clearance:0.05 or less

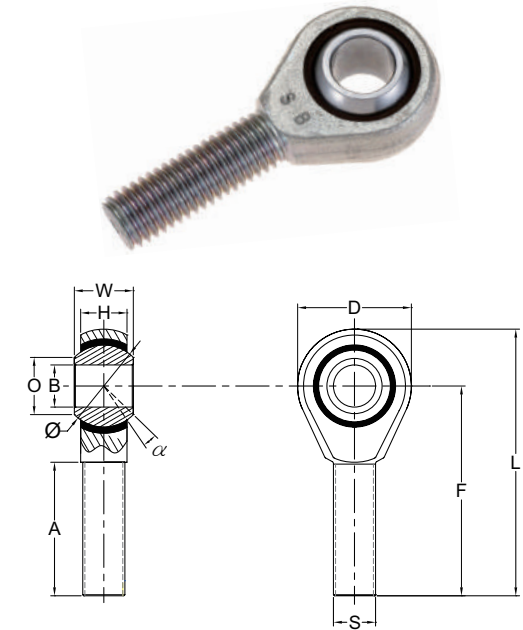

公制尺寸 / DIMENSIONS IN METRIC mm

型 號 Model No.	B H7	W +0 -0.1	D	L	O	H +0 -0.1	A +2 -0	F	Thread S	旋角 α	球徑 Ball Dia. Ø	徑向荷重 Radial S. load (kgf)	重量 Weight (g)
MOS 5 R/L	5	8	17	43.5	7.7	6	22	35	5x0.8	13	11.11	340	14
MOS 6 R/L	6	9	19	47.5	8.9	6.7	24	38	6x1.0	13	12.7	480	21
MOS 8 RF/LF MOS 8 R/L	8	12	23.5	56.5	10.4	9	26	45	8x1.0 8x1.25	13	15.88	680	40
MOS 10 RF/LF MOS 10 R/L	10	14	27	63.5	12.9	10.5	30	50	10x1.25 10x1.5	13	19.05	1070	65
MOS 12 RF/LF MOS 12 R/L	12	16	32	72	15.4	12	35	56	12x1.25 12x1.75	13	22.23	1650	95
MOS 14 RF/LF MOS 14 R/L	14	19	36	81	16.8	14	37	63	14x1.5 14x2.0	15	25.4	2040	146
MOS 16 RF/LF MOS 16 R/L	16	21	39	91.5	19.3	15	43	72	16x1.5 16x2.0	15	28.58	2470	185

英制尺寸 / DIMENSIONS IN INCHES

型 號 Model No.	B H7	W +0 -0.004	D	L	O	H +/- 0.004	A +0.08 -0	F	Thread S	旋角 α	球徑 Ball Dia. Ø	徑向荷重 Radial S. load (Lbs)	重量 Weight (Lbs)
MOS 1/4 R/L	0.2500	0.375	0.748	1.870	0.350	0.264	0.945	1.496	UNF 1/4-28	13	0.500	1060	0.05
MOS 5/16 R/L	0.3125	0.437	0.925	2.224	0.409	0.354	1.024	1.772	UNF 5/16-24	13	0.625	1500	0.09
MOS 3/8 R/L	0.3750	0.500	1.063	2.500	0.508	0.413	1.181	1.969	UNF 3/8-24	13	0.750	2360	0.14
MOS 7/16 R/L	0.4375	0.500	1.063	2.500	0.508	0.413	1.181	1.969	UNF 7/16-20	13	0.750	2360	0.14
MOS 1/2 R/L	0.5000	0.625	1.260	2.835	0.606	0.472	1.378	2.205	UNF 1/2-20	13	0.875	3640	0.22
MOS 5/8 R/L	0.6250	0.750	1.535	3.602	0.760	0.591	1.693	2.835	UNF 5/8-18	15	1.125	5450	0.41
MOS 3/4 R/L	0.7500	0.875	1.260	2.835	0.606	0.472	1.378	2.205	UNF 3/4-16	15	0.875	7470	0.21



■工程塑膠射出型

襯墊以杜邦 100ST 工程塑膠 (P.O.M.) 射出填充，堅實耐高拉力，扁平小寬幅，不佔空間

■材質

- 主體：中碳鋼 S45C，鍛造，表面鍍鋅 (Cr3+)
- 鋼珠：鉻鉬軸承鋼 SUJ-2，熱處理 HRC56 $\pm$ 2，鍍硬鉻
- 襯墊：杜邦 100ST POM 工程塑膠

■間隙 (mm)

徑向間隙值：小於 0.035
軸向間隙值：小於 0.05

■SELF-LUBRICATING TYPE


High strength engineering plastic injected liner. Flat design.

■MATERIALS

- BODY: Medium Carbon Steel S45C, Forged, Zinc Coated (Cr3+)
- BALL: Bearing Steel SUJ-2, Heat Treated HRC 56 $\pm$ 2, Hard Chrome Plated
- LINER: Friction resistant P.O.M. (Dupont 100ST)

■CLEARANCE (Unit: mm)

Radial Clearance: 0.035 or less
Axial Clearance: 0.05 or less

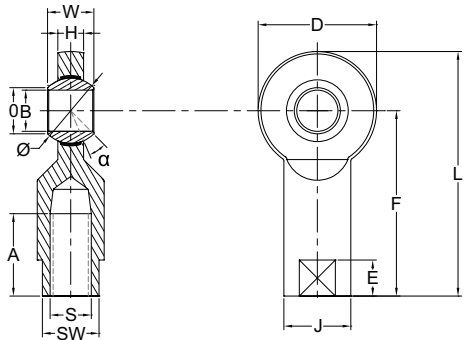

公制尺寸 / DIMENSIONS IN METRIC mm

型 號 Model No.	B H7	W +0 -0.1	D	L	O	H +0 -0.1	A +2 -0	F	J	E	SW +0 -0.2	Thread S	旋角 α	球徑 Ball Dia. $\varnothing$	徑向荷重 Radial S. load (kgf)	重量 Weight (g)
SI 6E, SIL 6E	6	6	20	40	9	4	12	30	10	6	9	6x1.0	13	11.11	750	17
SI 8EF, SIL 8EF SI 8E, SIL 8E	8	8	23	47.5	10	5	16	36	13	7	11	8x1.0 8x1.25	15	12.7	1180	36
SI 10EF, SIL 10EF SI 10E, SIL 10E	10	9	28	57	12	6	20	43	16	8	14	10x1.25 10x1.5	12	15.88	1610	60
SI 12EF, SIL 12EF SI 12E, SIL 12E	12	10	32	66	15	7	22	50	19	8	17	12x1.25 12x1.75	10	18	2250	92
SI 15ESF, SIL 15ESF SI 15ES, SIL 15ES SI 17ESF, SIL 17ESF SI 17ES, SIL 17ES	15	12	38	80	19	9	25	61	22	8	19	14x1.5 14x2.0	8	22.23	3300	160
SI 20ES, SIL 20ES	20	16	51	102.5	25	12	33	77	28	10	24	20x1.5	8	28.58	5500	280
SI 25ES, SIL 25ES	25	20	62	125	31	16	42	94	35	12	30	24x2.0	7	36.5	7610	575

*(1) 尺寸公差請詳附錄公差表 Please refer the tolerance table of index.

■工程塑膠射出型

襯墊以杜邦 100ST 工程塑膠 (P.O.M.) 射出填充，堅實耐高拉力，扁平小寬幅，不佔空間

■材質

- 主體：中碳鋼 S45C，鍛造，表面鍍鋅 (Cr3+)
- 鋼珠：鉻鉬軸承鋼 SUJ-2，熱處理 HRC 56 $\pm$ 2，鍍硬鉻
- 襯墊：杜邦 100ST POM 工程塑膠

■間隙 (mm)

徑向間隙值：小於 0.035
軸向間隙值：小於 0.05

■SELF-LUBRICATING TYPE


High strength engineering plastic injected liner. Flat design.

■MATERIALS

- BODY: Medium Carbon Steel S45C, Forged, Zinc Coated (Cr3+)
- BALL: Bearing Steel SUJ-2, Heat Treated HRC 56 $\pm$ 2, Hard Chrome Plated
- LINER: Friction resistant P.O.M. (Dupont 100ST)

■CLEARANCE (Unit: mm)

Radial Clearance: 0.035 or less
Axial Clearance: 0.05 or less

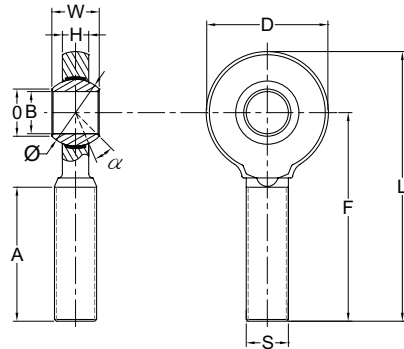

公制尺寸 / DIMENSIONS IN METRIC mm

型 號 Model No.	B H7	W +0 -0.1	D	L	O	H +0 -0.1	A +2 -0	F	Thread S	旋角 α	球徑 Ball Dia. $\varnothing$	徑向荷重 Radial S. load (kgf)	重量 Weight (g)
SA 6E, SAL 6E	6	6	20	46	9	4	22	36	6x1.0	13	11.11	750	14
SA 8EF, SAL 8EF SA 8E, SAL 8E	8	8	23	53.5	10	5	25	42	8x1.0 8x1.25	15	12.7	1180	24
SA 10EF, SAL 10EF SA 10E, SAL 10E	10	9	28	62	12	6	29	48	10x1.25 10x1.5	12	15.88	1610	41
SA 12EF, SAL 12EF SA 12E, SAL 12E	12	10	32	70	15	7	33	54	12x1.25 12x1.75	10	18	2250	67
SA 15ESF, SAL 15ESF SA 15ES, SAL 15ES	15	12	38	83	19	9	36	64	14x1.5 14x2.0	8	22.23	3300	112
SA 17ESF, SAL 17ESF SA 17ES, SAL 17ES	17	14	44	91.5	21	10	40	69.5	16x1.5 16x2.0	10	25.4	4130	155
SA 20ES, SAL 20ES	20	16	51	103.5	25	12	47	78	20x1.5	8	28.58	5500	265
SA 25ES, SAL 25ES	25	20	62	125	31	16	57	94	24x2.0	7	36.5	7610	495


*(1) 尺寸公差請詳附錄公差表 Please refer the tolerance table of index.

RBT series

- 不銹鋼耐酸鹼型
採用超耐磨襯套材料 (PTFE) · 免給油設計 · 精密無間隙 · 不銹鋼材質 · 適合酸鹼場所使用
- 材質
· 主體 : 不銹鋼 SUS304 或 SUS303
· 鋼珠 : 不銹鋼 SUS 440C · 熱處理 HRC 58°±2
· 襯墊 : 鐵氟龍銅網 (PTFE)- 柔軟堅韌銅網和氟樹脂塗佈組成
- 間隙 (mm)
徑向間隙值 : 小於 0.035
軸向間隙值 : 小於 0.05

- SELF-LUBRICATING TYPE
Stainless steel body and ball. Highly wear-resisting PTFE liner. Well made with low clearance. Corrosion resistance.
- MATERIALS
·BODY:Stainless Steel SUS 304 or SUS303
·BALL:Stainless Steel SUS 440C or SUS630 Heat Treated
·LINER: PTFE, Strong & flexible bronze mesh spread with fluorine resin
- CLEARANCE (Unit: mm)
Radial Clearance:0.035 or less
Axial Clearance:0.05 or less

桿端軸承 ROD END BEARING SB

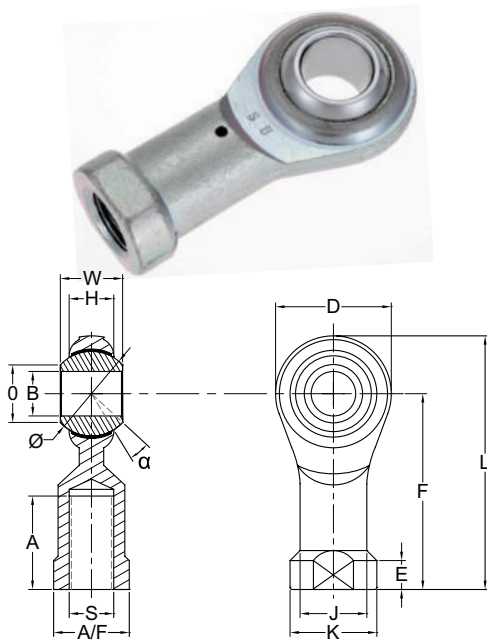

公制尺寸 / DIMENSIONS IN METRIC mm

型 號	B	W	D	L	O	H	A	F	J	K	E	A/F	Thread	旋角	球徑 Ball Dia. Ø	徑向荷重 Radial S. load (kgf)	重量 Weight (g)
Model No.	H7	+0 -0.1				+0.1 -0.4	+2 -0					+0 -0.2	S	α			
RBT 5 R/L	5	8	17	35.5	7.7	5.5	12	27	9	11	4	9	5x0.8	13	11.11	390	16
RBT 6 R/L	6	9	19	39.5	8.9	6	14	30	10	13	5	11	6x1.0	13	12.7	500	24
RBT 8 RF/LF RBT 8 R/L	8	12	23.5	47.5	10.4	8	17	36	13	16	5	14	8x1.0 8x1.25	13	15.88	740	41
RBT 10 RF/LF RBT 10 R/L	10	14	27	58.5	12.9	10	21	45	15	19	7	17	10x1.25 10x1.5	13	19.05	940	70
RBT 12 RF/LF RBT 12 R/L	12	16	32	66	15.4	11	24	50	18	22	7	19	12x1.25 12x1.75	13	22.23	1100	105
RBT 14 RF/LF RBT 14 R/L	14	19	36	75	16.8	12	27	57	20	25	8	21	14x1.5 14x2.0	15	25.4	1520	150
RBT 16 RF/LF RBT 16 R/L	16	21	39	83.5	19.3	13	33	64	22	27	8	22	16x1.5 16x2.0	15	28.58	2020	180
RBT 18 R/L	18	23	43	91.5	21.8	15	36	70	25	31	10	27	18x1.5	15	31.75	2520	255
RBT 20 R/L	20	25	47	100.5	24.3	16	40	77	28	34	10	30	20x1.5	15	34.93	2780	340
RBT 22 R/L	22	28	50	109	25.9	18	43	84	30	37	12	32	22x1.5	15	38.1	3590	420
RBT 25 R/L	25	31	56	122	29.6	20	48	94	34	42	12	36	24x2.0	15	42.85	5430	590
RBT 30 R/L	30	37	68	145	34.8	24	58	111	40	50	15	41	30x2.0	15	50.8	6910	950

*註：RBT22, RBT25, RBT30 為接單生產 *NOTE: RBT22, RBT25, RBT30 are made by order

英制尺寸 / DIMENSIONS IN INCHES

型 號	B	W	D	L	O	H	A	F	J	K	E	A/F	Thread	旋角	球徑 Ball Dia. Ø	徑向荷重 Radial S. load (Lbs)	重量 Weight (Lbs)
Model No.	H7	+0 -0.004				+0.004 -0.016	+0.08 -0					+0 -0.008	S	α			
RBT 3/16 R/L	0.1875	0.312	0.669	1.398	0.303	0.217	0.472	1.063	0.354	0.433	0.157	0.354	UNF 3/16-32	13	0.437	860	0.04
RBT 1/4 R/L	0.2500	0.375	0.748	1.555	0.350	0.236	0.551	1.181	0.394	0.512	0.197	0.433	UNF 1/4-28	13	0.500	1100	0.05
RBT 5/16 R/L	0.3125	0.437	0.925	1.870	0.409	0.315	0.669	1.417	0.512	0.630	0.197	0.551	UNF 5/16-24	13	0.625	1630	0.09
RBT 3/8 R/L	0.3750	0.500	1.063	2.303	0.508	0.394	0.827	1.772	0.591	0.748	0.276	0.669	UNF 3/8-24	13	0.750	2070	0.15
RBT 7/16 R/L	0.4375	0.500	1.063	2.303	0.508	0.394	0.827	1.772	0.591	0.748	0.276	0.669	UNF 7/16-20	13	0.750	2070	0.15
RBT 1/2 R/L	0.5000	0.625	1.260	2.598	0.606	0.433	0.945	1.969	0.709	0.866	0.276	0.748	UNF 1/2-20	13	0.875	2430	0.23
RBT 5/8 R/L	0.6250	0.750	1.535	3.287	0.760	0.512	1.299	2.520	0.866	1.063	0.315	0.866	UNF 5/8-18	15	1.125	4450	0.44
RBT 3/4 R/L	0.7500	0.875	1.693	3.602	0.858	0.591	1.417	2.756	0.984	1.220	0.394	1.063	UNF 3/4-16	15	1.250	6130	0.63
RBT 1 R/L	1.0000	1.220	2.205	4.803	1.165	0.787	1.890	3.701	1.339	1.654	0.472	1.417	UNF 1-12	15	1.687	11970	1.50

*註：RBT3/16~RBT3/4為接單生產 *NOTE: RBT3/16~RBT3/4 are made by order


接單生產 (MADE BY ORDER)

RBM series

- 不銹鋼耐酸鹼型
採用超耐磨襯套材料 (PTFE) · 免給油設計 · 精密無間隙 · 不銹鋼材質 · 適合酸鹼場所使用
- 材質
· 主體 : 不銹鋼 SUS304 或 SUS303
· 鋼珠 : 不銹鋼 SUS 440C · 熱處理 HRC 58°±2
· 襯墊 : 鐵氟龍銅網 (PTFE)- 柔軟堅韌銅網和氟樹脂塗佈組成
- 間隙 (mm)
徑向間隙值 : 小於 0.035
軸向間隙值 : 小於 0.05

- SELF-LUBRICATING TYPE
Stainless steel body and ball. Highly wear-resisting PTFE liner. Well made with low clearance. Corrosion resistance.
- MATERIALS
·BODY:Stainless Steel SUS 304 or SUS303
·BALL:Stainless Steel SUS 440C or SUS630 Heat Treated
·LINER: PTFE, Strong & flexible bronze mesh spread with fluorine resin
- CLEARANCE (Unit: mm)
Radial Clearance:0.035 or less
Axial Clearance:0.05 or less

桿端軸承 ROD END BEARING SB

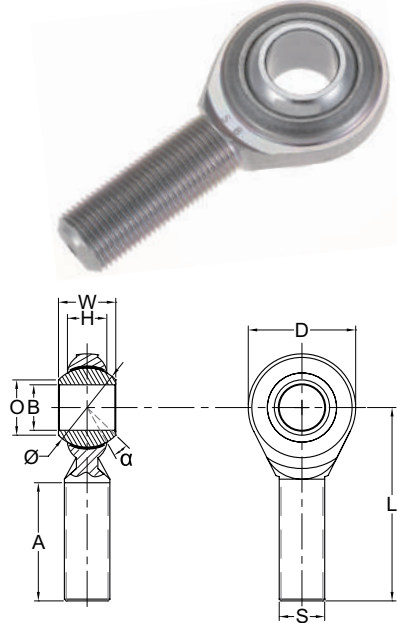

公制尺寸 / DIMENSIONS IN METRIC mm

型 號	B	W	D	L	O	H	A	F	Thread	旋角	球徑 Ball Dia. Ø	徑向荷重 Radial S. load (kgf)	重量 Weight (g)
Model No.	H7	+0 -0.1				+0.1 -0.4	+2 -0		S	α			
RBM 3 R/L	3	6	14	32	7.3	4.5	13	25	3x0.5	13	9.3	220	8
RBM 4 R/L	4	7	14	37	7.6	5.3	17	30	4x0.7	13	10.32	220	8
RBM 5 R/L	5	8	17	43.5	7.7	5.5	22	35	5x0.8	13	11.11	340	13
RBM 6 R/L	6	9	19	47.5	8.9	6	24	38	6x1.0	13	12.7	490	17
RBM 8 RF/LF RBM 8 R/L	8	12	23.5	56.5	10.4	8	26	45	8x1.0 8x1.25	13	15.88	690	33
RBM 10 RF/LF RBM 10 R/L	10	14	27	63.5	12.9	10	30	50	10x1.25 10x1.5	13	19.05	940	54
RBM 12 RF/LF RBM 12 R/L	12	16	32	72	15.4	11	35	56	12x1.25 12x1.75	13	22.23	1100	85
RBM 14 RF/LF RBM 14 R/L	14	19	36	81	16.8	12	37	63	14x1.5 14x2.0	15	25.4	1520	125
RBM 16 RF/LF RBM 16 R/L	16	21	39	91.5	19.3	13	43	72	16x1.5 16x2.0	15	28.58	2020	170
RBM 18 R/L	18	23	44	97	21.8	15	46	75	18x1.5	15	31.75	2520	230
RBM 20 R/L	20	25	47	102.5	24.3	16	48	79	20x1.5	15	34.93	2780	305
RBM 22 R/L	22	28	50	109	25.9	18	51	84	22x1.5	15	38.1	3590	385
RBM 25 R/L	25	31	56	122	29.6	20	57	94	24x2.0	15	42.85	5430	515
RBM 30 R/L	30	37	68	145	34.8	24	68	111	30x2.0	15	50.8	6910	885

英制尺寸 / DIMENSIONS IN INCHES

型 號	B	W	D	L	O	H	A	F	Thread	旋角	球徑 Ball Dia. Ø	徑向荷重 Radial S. load (Lbs)	重量 Weight (Lbs)
Model No.	H7	+0 -0.004				+ 0.004 -0.016	+0.08 -0		S	α			
RBM 3/16 R/L	0.1875	0.312	0.669	1.713	0.303	0.217	0.866	1.378	UNF 3/16-32	13	0.4374	750	0.03
RBM 1/4 R/L	0.2500	0.375	0.748	1.870	0.350	0.236	0.945	1.496	UNF 1/4-28	13	0.500	1080	0.04
RBM 5/16 R/L	0.3125	0.437	0.925	2.224	0.409	0.315	1.024	1.772	UNF 5/16-24	13	0.625	1520	0.07
RBM 3/8 R/L	0.3750	0.500	1.063	2.500	0.508	0.394	1.181	1.969	UNF 3/8-24	13	0.750	2070	0.12
RBM 7/16 R/L	0.4375	0.500	1.063	2.500	0.508	0.394	1.181	1.969	UNF 7/16-20	13	0.750	2070	0.12
RBM 1/2 R/L	0.5000	0.625	1.260	2.835	0.606	0.433	1.378	2.205	UNF 1/2-20	13	0.875	2430	0.19
RBM 5/8 R/L	0.6250	0.750	1.535	3.602	0.760	0.512	1.693	2.835	UNF 5/8-18	15	1.125	4450	0.4
RBM 3/4 R/L	0.7500	0.875	1.693	3.819	0.858	0.590	1.811	2.953	UNF 3/4-16	15	1.250	6130	0.55
RBM 1 R/L	1.0000	1.220	2.205	4.803	1.165	0.787	2.244	3.701	UNF 1-12	15	1.687	11970	1.34

接單生產 (MADE BY ORDER)

接單生產 (MADE BY ORDER)

HKF/XKF


桿端軸承 ROD END BEARING



series

- 重力耐磨型
適用於重負載車輛或機器，超耐磨免給油
- 材質
 - 主體 :HKF- 中碳鋼 S45C，熱處理，鍍鋅 (Cr3+)
 - XKF- 合金鋼 SCM440，接受訂製
 - 鋼珠：鉻鉬軸承鋼 SUJ-2，熱處理 HRC 56°±2，鍍硬鉻
 - 外框：中碳鋼 S45C 或不銹鋼 SUS410
 - 襯墊：鐵氟龍銅網 (PTFE)- 柔軟堅韌銅網和氟樹脂塗佈組成
- 間隙 (mm)
 - 徑向間隙值：小於 0.035
 - 軸向間隙值：小於 0.05

- SELF-LUBRICATING TYPE
Suitable for heavy load applications.
- MATERIALS
 - BODY:HKF- Carbon Steel S45C，Heat Treated, Zinc Coated (Cr3+)
 - XKF- Alloy Steel SCM440, made by order
 - BALL: Bearing Steel SUJ-2, Heat Treated HRC56°±2, Hard Chrome Plated
 - RACE: Medium Carbon Steel S45C or Stainless Steel SUS410
 - LINER: PTFE, Strong & flexible bronze mesh spread with fluorine resin
- CLEARANCE (Unit: mm)
 - Radial Clearance: 0.035 or less
 - Axial Clearance: 0.05 or less

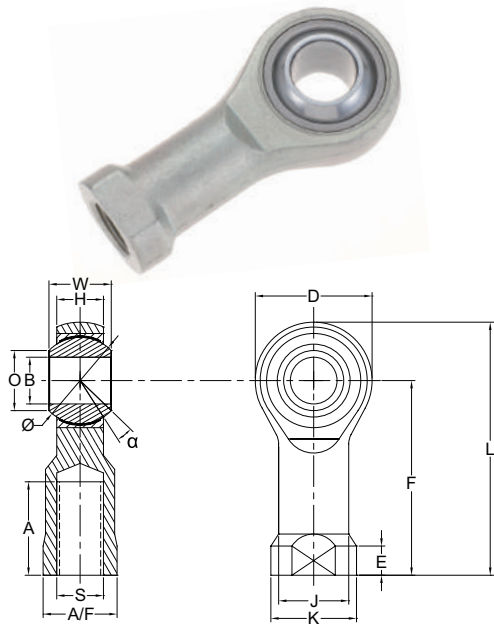

公制尺寸 / DIMENSIONS IN METRIC mm

型 號	B	W	D	L	O	H	A	F	J	K	E	A/F	Thread	旋角	球徑	徑向荷重	重量
Model No.	H7	+0 -0.1				+0 -0.1	+2 -0					+0 -0.2	S	α	Ball Dia. Ø	Radial S. load (kgf) HKF XKF	Weight (g)
HKF 5 R/L	5	8	12	34	7.7	6	9	28	9	11	5	9	5x0.8	13	11.11	390 1400	18
HKF 6 R/L	6	9	14	36.5	8.9	6.7	10	29.5	10	13	5	11	6x1.0	13	12.7	500 1900	25
HKF 8 RF/LF HKF 8 R/L	8	12	17	44.5	10.4	9	13	36	13	16	5	14	8x1.0 8x1.25	13	15.88	740 3220	48
HKF 10 RF/LF HKF 10 R/L	10	14	21	55	12.9	10.5	15	44.5	15	19	7	17	10x1.25 10x1.5	13	19.05	940 4860	77
HKF 12 RF/LF HKF 12 R/L	12	16	24	61	15.4	12	18	49	18	22	7	19	12x1.25 12x1.75	13	22.23	1100 5220	123
HKF 14 RF/LF HKF 14 R/L	14	19	27	70.5	16.8	14	20	57	20	25	8	21.5	14x1.5 14x2.0	15	25.4	1520 6950	168
HKF 16 RF/LF HKF 16 R/L	16	21	33	81	19.3	15	22	64.5	22	27	8	22	16x1.5 16x2.0	15	28.58	2020 7390	214
HKF 18 R/L	18	23	36	88	21.8	17	25	70	25	31	10	27	18x1.5	15	31.75	2520 8310	295
HKF 20 R/L	20	25	40	96.5	24.3	18	28	76.5	28	34	10	30	20x1.5	15	34.93	2780 11640	300
HKF 22 R/L	22	28	43	104.5	25.9	20	30	83	30	37	12	32	22x1.5	15	38.1	3590 11710	495
HKF 25 R/L	25	31	48	116	29.6	22	34	92	34	42	12	36	24x2.0	15	42.85	5430 13850	680
HKF 30 R/L	30	37	56	139	34.8	26	40	111	40	50	15	41	30x2.0	15	50.8	6910 18880	1115

* 註：HKF 系列為接單生產 *NOTE: HKF Series are made by order.

英制尺寸 / DIMENSIONS IN INCHES

型 號	B	W	D	L	O	H	A	F	J	K	E	A/F	Thread	旋角	球徑	徑向荷重	重量
Model No.	H7	+0 -0.004				+0 -0.004	+0.08 -0					+0 -0.08	S	α	Ball Dia. Ø	Radial S. load (kgf) HKF XKF	Weight (g)
HKF 3/16 R/L	0.1875	0.312	0.303	1.339	1.437	0.669	0.472	0.236	0.354	0.433	0.157	0.354	UNF3/16-32	13	0.437	1600 3000	0.04
HKF 1/4 R/L	0.2500	0.375	0.350	1.437	1.535	0.748	0.551	0.264	0.394	0.512	0.197	0.433	UNF 1/4-28	13	0.500	2000 4100	0.06
HKF 5/16 R/L	0.3125	0.437	0.409	1.752	1.870	0.925	0.669	0.354	0.512	0.630	0.197	0.551	UNF 5/16-24	13	0.625	2900 7000	0.11
HKF 3/8 R/L	0.3750	0.500	0.508	2.165	2.283	1.063	0.827	0.433	0.590	0.748	0.256	0.669	UNF 3/8-24	13	0.750	3650 10500	0.17
HKF 7/16 R/L	0.4375	0.500	0.508	2.165	2.283	1.063	0.827	0.433	0.590	0.748	0.256	0.669	UNF 7/16-20	13	0.750	3650 10500	0.17
HKF 1/2 R/L	0.5000	0.625	0.606	2.402	2.559	1.259	0.945	0.472	0.709	0.866	0.256	0.748	UNF 1/2-20	13	0.875	4100 11400	0.27
HKF 5/8 R/L	0.6250	0.750	0.760	3.189	3.307	1.535	1.299	0.590	0.866	1.063	0.315	0.866	UNF 5/8-18	15	1.125	6800 16200	0.47
HKF 3/4 R/L	0.7500	0.875	0.858	3.465	3.602	1.692	1.417	0.669	0.984	1.220	0.394	1.063	UNF 3/4-16	15	1.250	9600 18200	0.67
HKF 1 R/L	1.0000	1.220	1.165	4.567	4.724	2.205	1.890	0.866	1.339	1.654	0.472	1.417	UNF 1-12	15	1.687	14400 30400	1.47

* 註：HKF 系列為接單生產 *NOTE: HKF Series are made by order.

HKM/XKM


桿端軸承 ROD END BEARING



series

- 重力耐磨型
適用於重負載車輛或機器，超耐磨免給油
- 材質
 - 主體 :HKM- 中碳鋼 S45C，熱處理，鍍鋅 (Cr3+)
 - XKM- 合金鋼 SCM440，接受訂製
 - 鋼珠：鉻鉬軸承鋼 SUJ-2，熱處理 HRC 56°±2，鍍硬鉻
 - 外框：中碳鋼 S45C 或不銹鋼 SUS410
 - 襯墊：鐵氟龍銅網 (PTFE)- 柔軟堅韌銅網和氟樹脂塗佈組成
- 間隙 (mm)
 - 徑向間隙值：小於 0.035
 - 軸向間隙值：小於 0.05

- SELF-LUBRICATING TYPE
Suitable for heavy load applications.
- MATERIALS
 - BODY:HKM- Carbon Steel S45C，Heat Treated, Zinc Coated (Cr3+)
 - XKM- Alloy Steel SCM440，made by order
 - BALL: Bearing Steel SUJ-2, Heat Treated HRC 56°±2, Hard Chrome Plated
 - RACE: Medium Carbon Steel S45C or Stainless Steel SUS410
 - LINER: PTFE, Strong & flexible bronze mesh spread with fluorine resin
- CLEARANCE (Unit: mm)
 - Radial Clearance: 0.035 or less
 - Axial Clearance: 0.05 or less

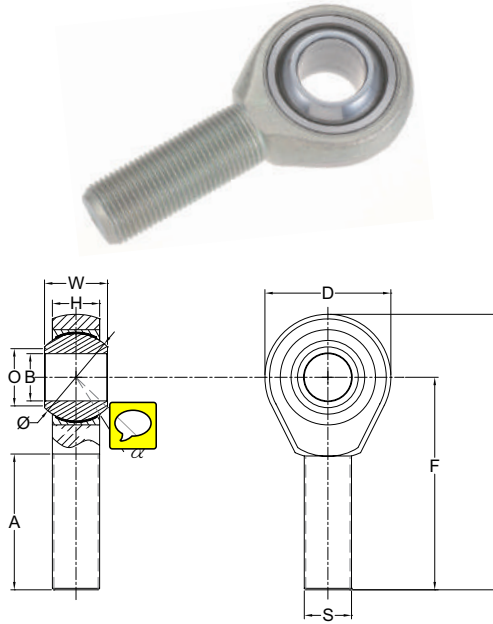

公制尺寸 / DIMENSIONS IN METRIC mm

型 號	B	W	D	L	O	H	A	Thread	旋角	球徑	徑向荷重	重量
Model No.	H7	+0 -0.1				+0 -0.1	+2 -0	S	α	Ball Dia. Ø	Radial S. load (kgf) HKM XKM	Weight (g)
HKM 5 R/L	5	8	17	43.5	7.7	6	22	35	5x0.8	13	11.1	1200 14
HKM 6 R/L	6	9	19	47.5	8.9	6.7	24	38	6x1.0	13	12.7	1750 21
HKM 8 RF/LF HKM 8 R/L	8	12	23.5	55.5	10.4	9	26	44	8x1.0 8x1.25	13	15.9	3210 41
HKM 10 RF/LF HKM 10 R/L	10	14	27	63.5	12.9	10.5	30	50	10x1.25 10x1.5	13	19.1	4860 65
HKM 12 RF/LF HKM 12 R/L	12	16	32	72	15.4	12	35	56	12x1.25 12x1.75	13	22.2	5400 100
HKM 14 RF/LF HKM 14 R/L	14	19	36	81	16.8	14	37	63	14x1.5 14x2.0	15	25.4	6950 146
HKM 16 RF/LF HKM 16 R/L	16	21	39	91.5	19.3	15	43	72	16x1.5 16x2.0	15	28.6	7390 195
HKM 18 R/L	18	23	44	97	21.8	17	46	75	18x1.5	15	31.8	8310 270
HKM 20 R/L	20	25	47	104	24.3	18	48	80.5	20x1.5	15	34.9	11640 345
HKM 22 R/L	22	28	50	109	25.9	20	51	84	22x1.5	15	38.1	11710 455
HKM 25 R/L	25	31	56	122	29.6	22	57	94	24x2.0	15	42.9	13850 590
HKM 30 R/L	30	37	68	146.5	34.8	26	66	112.5	30x2.0	15	50.8	18880 1060

* 註：HKM 系列為接單生產 *NOTE: HKM Series are made by order.

英制尺寸 / DIMENSIONS IN INCHES

型 號	B	W	D	L	O	H	A	F	Thread	旋角	球徑	徑向荷重	重量
Model No.	H7	+0 -0.004				+0 -0.004	+0.08 -0		S	α	Ball Dia. Ø	Radial S. load (kgf) HKM XKM	Weight (g)
HKM 3/16 R/L	0.1875	0.312	0.669	1.713	0.303	0.236	0.866	1.378	UNF 3/16-32	13	0.437	1400 2600	0.03
HKM 1/4 R/L	0.2500	0.375	0.748	1.870	0.350	0.264	0.945	1.496	UNF 1/4-28	13	0.500	1900 3800	0.05
HKM 5/16 R/L	0.3125	0.437	0.925	2.185	0.409	0.354	1.024	1.732	UNF 5/16-24	13	0.625	2910 7000	0.09
HKM 3/8 R/L	0.3750	0.500	1.063	2.500	0.508	0.433	1.181	1.969	UNF 3/8-24	13	0.750	3650 10600	0.14
HKM 7/16 R/L	0.4375	0.500	1.063	2.500	0.508	0.433	1.181	1.969	UNF 7/16-20	13	0.750	3650 10600	0.14
HKM 1/2 R/L	0.5000	0.625	1.260	2.835	0.606	0.472	1.378	2.205	UNF 1/2-20	13	0.875	4100 11800	0.22
HKM 5/8 R/L	0.6250	0.750	1.535	3.602	0.760	0.590	1.693	2.835	UNF 5/8-18	15	1.125	6800 16200	0.43
HKM 3/4 R/L	0.7500	0.875	1.732	3.819	0.858	0.669	1.811	2.953	UNF 3/4-16	15	1.250	9600 18300	0.60
HKM 1 R/L	1.0000	1.220	2.205	4.803	1.165	0.866	2.244	3.701	UNF 1-12	15	1.687	14480 30530	1.30

* 註：HKM 系列為接單生產 *NOTE: HKM Series are made by order.


AXF
series

桿端軸承
ROD END BEARING



- 鋁合金自潤型
主體採用高強度航太鋁合金鍛造，質輕、強韌，耐腐蝕
- 材質
·主體：航太鋁合金 7075-T6，表面陽極處理（紅、藍、銀白）
·鋼珠：鉻鉬軸承鋼 SUJ-2，熱處理 HRC 56°±2，鍍硬鉻
·襯墊：特殊耐磨尼龍複合材料
- 間隙 (mm)
徑向間隙值：小於 0.035
軸向間隙值：小於 0.05

- SELF-LUBRICATING TYPE
Light weight, high strength aircraft alluminum alloy forging body.
Corrosion resistance.
- MATERIALS
·BODY:Aircraft Aluminum 7075-T6, Color Anodized Red, Blue or Silver
·BALL:Bearing Steel SUJ-2, Heat Treated HRC 56°±2, Hard Chrome Plated
·LINER: Special Reinforce Nylon Material
- CLEARANCE (Unit: mm)
Radial Clearance:0.035 or less
Axial Clearance:0.05 or less

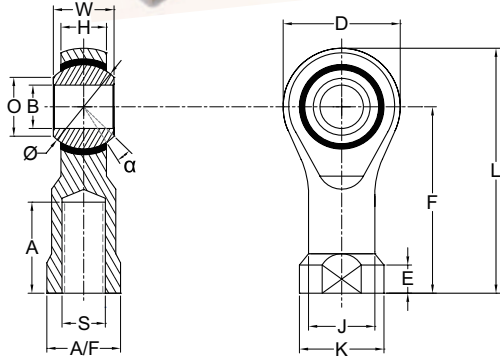

公制尺寸 / DIMENSIONS IN METRIC mm																		
型 號	B	W	D	L	O	H	A	F	J	K	E	A/F	Thread	旋角	球徑	徑向荷重	重量	
Model No.	H7	+0 -0.1				+0 -0.1	+2 -0					+0 -0.2		S	α	Ball Dia. Ø	Radial S. load (kgf)	Weight (g)
AXF 6 R/L	6	9	19	39.5	8.9	6.7	14	30	10	13	5	11	6x1.0	13	12.7	1320	18	
AXF 8 RF/LF AXF 8 R/F	8	12	23.5	47.5	10.4	9	17	36	13	16	5	14	8x1.0 8x1.25	13	15.88	1630	27	
AXF 10 RF/LF AXF 10 R/L	10	14	27	58.5	12.9	10.5	21	45	15	19	7	17	10x1.25 10x1.5	13	19.05	2040	50	
AXF 12 RF/LF AXF 12 R/L	12	16	32	66	15.4	12	24	50	18	22	7	19	12x1.25 12x1.75	13	22.23	3180	75	

* 註：AXF 系列為接單生產 *NOTE: AXF Series are made by order.

英制尺寸 / DIMENSIONS IN INCHES																		
型 號		B	W	D	L	O	H	A	F	J	K	E	A/F	Thread	旋角	球徑	徑向荷重	重量
Model No.		H7	+0 -0.004				+0 - 0.004	+0.08 -0					+0 -0.008	S	α	Ball Dia. Ø	Radial S. load (Lbs)	Weight (Lbs)
AXF 1/4	R/L	0.2500	0.375	0.748	1.555	0.350	0.264	0.551	1.181	0.394	0.512	0.197	0.433	UNF 1/4-28	13	0.500	2900	0.04
AXF 5/16	R/L	0.3125	0.437	0.925	1.870	0.409	0.354	0.669	1.417	0.512	0.630	0.197	0.551	UNF 5/16-24	13	0.625	3600	0.06
AXF 3/8	R/L	0.3750	0.500	1.063	2.303	0.508	0.433	0.827	1.772	0.590	0.748	0.256	0.669	UNF 3/8-24	13	0.750	4500	0.11
AXF 1/2	R/L	0.5000	0.625	1.260	2.598	0.606	0.472	0.945	1.969	0.709	0.866	0.256	0.748	UNF 1/2-20	13	0.875	7000	0.17

* 註：AXF 系列為接單生產 *NOTE: AXF Series are made by order.

接單生產 (MADE BY ORDER)


AXM
series

桿端軸承
ROD END BEARING



- 鋁合金自潤型
主體採用高強度航太鋁合金鍛造，質輕、強韌，耐腐蝕
- 材質
·主體：航太鋁合金 7075-T6，表面陽極處理（紅、藍、銀白）
·鋼珠：鉻鉬軸承鋼 SUJ-2，熱處理 HRC 56°±2，鍍硬鉻
·襯墊：特殊耐磨尼龍複合材料
- 間隙 (mm)
徑向間隙值：小於 0.035
軸向間隙值：小於 0.05

- SELF-LUBRICATING TYPE
Light weight, high strength aircraft alluminum alloy forging body.
Corrosion resistance.
- MATERIALS
·BODY:Aircraft Aluminum 7075-T6, Color Anodized Red, Blue or Silver
·BALL:Bearing Steel SUJ-2, Heat Treated HRC 56°±2, Hard Chrome Plated
·LINER: Special Reinforce Nylon Material
- CLEARANCE (Unit: mm)
Radial Clearance:0.035 or less
Axial Clearance:0.05 or less

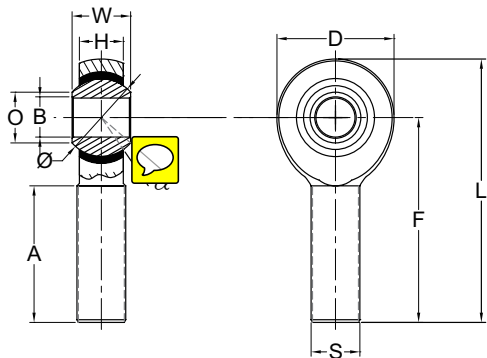

公制尺寸 / DIMENSIONS IN METRIC mm													
型 號	B	W	D	L	O	H	A	F	Thread	旋角	球徑	徑向荷重	重量
Model No.	H7	+0 -0.1				+ 0 -0.1	+2 -0		S	α	Ball Dia. Ø	Radial S. load (kgf)	Weight (g)
AXM 6 R/L	6	9	19	45.5	8.9	6.7	24	36	6x1.0	13	12.7	1140	14
AXM 8 RF/LF AXM 8 R/L	8	12	23.5	53.5	10.4	9	26	42	8x1.0 8x1.25	13	15.88	1450	23
AXM 10 RF/LF AXM 10 R/L	10	14	26	61	12.9	10.5	30	48	10x1.25 10x1.5	13	19.05	2040	23
AXM 12 RF/LF AXM 12 R/L	12	16	30	69	15.4	12	35	54	12x1.25 12x1.75	13	22.23	3500	55
AXM 16 RF/LF AXM 16 R/L	16	21	38	91	19.3	15	43	72	16x1.5 16x2.0	15	28.58	3900	82
AXM 18 R/L	18	23	44	97	21.8	17	46	75	18x1.5	15	31.75	4990	110
AXM 20 R/L	20	25	47	101.5	24.3	18	48	78	20x1.5	15	34.93	6080	132

* 註：AXM 系列為接單生產 *NOTE: AXM Series are made by order.

英制尺寸 / DIMENSIONS IN INCHES													
型 號	B	W	D	L	O	H	A	F	Thread	旋角	球徑	徑向荷重	重量
Model No.	H7	+0 -0.004				+ 0 -0.004	+0.08 -0		S	α	Ball Dia. Ø	Radial S. load (Lbs)	Weight (Lbs)
AXM 1/4 R/L	0.2500	0.375	0.748	1.791	0.350	0.264	0.945	1.417	UNF 1/4-28	13	0.500	2500	0.03
AXM 5/16 R/L	0.3125	0.437	0.925	2.106	0.409	0.354	1.024	1.654	UNF 5/16-24	13	0.625	3200	0.05
AXM 3/8 R/L	0.3750	0.500	1.024	2.402	0.508	0.413	1.181	1.890	UNF 3/8-24	13	0.750	4500	0.05
AXM 1/2 R/L	0.5000	0.625	1.181	2.717	0.606	0.472	1.378	2.126	UNF 1/2-20	13	0.875	7700	0.12
AXM 5/8 R/L	0.6250	0.750	1.496	3.583	0.760	0.590	1.693	2.835	UNF 5/8-18	15	1.125	8600	0.18
AXM 3/4 R/L	0.7500	0.875	1.732	3.819	0.858	0.669	1.811	2.953	UNF 3/4-16	15	1.250	13400	0.29

* 註：AXM 系列為接單生產 *NOTE: AXM Series are made by order.

PB/PB_T/PBN series

球面軸承
SPHERICAL BEARING




PC series

球面軸承
SPHERICAL BEARING



- 材質
 - 外框 :PB, PB_T 系列 - 中碳鋼 S45C
 - PBN 系列 - 中碳鋼 S45C · 表面磷酸鋁皮膜處理
 - 鋼珠 : 鉻鉬軸承鋼 SUJ-2 · 熱處理 HRC 56°±2 · 鍍硬鉻
 - 襯墊 :PB 系列 - 合金銅
 - PB_T 系列 - 鐵氟龍銅網 (PTFE)
 - PBN 系列 - 特殊耐磨尼龍複合材料
- 間隙 (mm)
 - PB Series
 - 徑向間隙值：小於 0.035 / 軸向間隙值：小於 0.1
 - PB_T Series / PBN Series
 - 徑向間隙值：小於 0.035 / 軸向間隙值：小於 0.05

- MATERIALS
 - RACE:PB, PB_T Series - Medium Carbon Steel S45C
 - PBN Series - Medium Carbon Steel S45C, Phosphatizing Treated
 - BALL:Bearing Steel SUJ-2, Heat Treated HRC 56°±2, Hard Chrome Plated
 - LINER:PB Series - Copper Alloy
 - PB_T Series - PTFE
 - PBN Series - Special Reinforce Nylon Material
- CLEARANCE (Unit: mm)
 - PB Series
 - Radial Clearance:0.035 or less / Axial Clearance:0.1 or less
 - PB_T Series / PBN Series
 - Radial Clearance:0.035 or less / Axial Clearance:0.05 or less

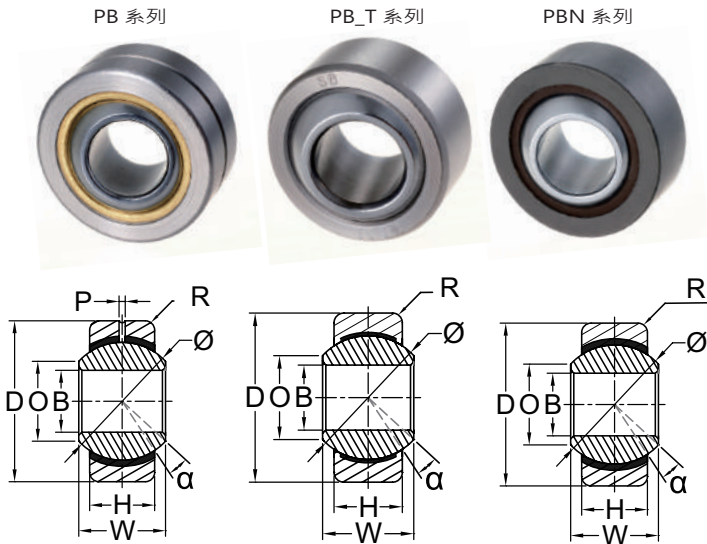


公制尺寸 / DIMENSIONS IN METRIC mm											
型 號	B	W	D	O	H	P	R	旋角	球徑	徑向荷重	重量
Model No.	H7	+0 -0.1	h7		+0 -0.1			α	Ball Dia. Ø	Radial S. load (kgf)	Weight (g)
PB 4T	4	7	13.0	7.0	4.5	-	0.5	13.00	10.32	550	5
PB 5	5	8	16.0	7.7	6.0	0.8	0.5	13.00	11.11	790	9
PB 5T						-					
PBN 5						-					
PB 6	6	9	18.0	8.9	6.7	0.8	1.0	13	12.70	990	14
PB 6T						-					
PBN 6						-					
PB 8	8	12	22.0	10.4	9.0	1	1.0	13	15.88	1630	24
PB 8T						-					
PBN 8						-					
PB 10	10	14	26.0	12.9	10.5	1	1.5	13	19.05	2340	39
PB 10T						-					
PBN 10						-					
PB 12	12	16	30.0	15.4	12.0	1	1.5	13	22.23	3160	58
PB 12T						-					
PBN 12						-					
PB 14	14	19	34.0	16.8	14.0	1.2	2.0	15	25.40	4080	86
PB 14T						-					
PB 16						1.2					
PB 16T	16	21	38.0	19.3	15.0	-	2.0	15	28.58	5090	115
PBN 16						-					
PB 18						1.5					
PB 18T	18	23	42.0	21.8	17.0	-	2.0	15	31.75	6220	160
PB 20						1.5					
PB 20T						-					
PBN 20	20	25	46.0	24.3	18.0	-	3.0	15	34.93	7440	200
PB 22						1.5					
PB 22T						-					
PB 25	25	31	56.0	29.6	22.0	1.5	3.0	15	42.85	11210	360
PB 25T						-					

* 註：PB_T 及 PBN 系列為接單生產 *NOTE: PB_T/ PBN Series are made by order.

- 強力耐磨軸承 · 免給油、自潤型
- 材質
 - 外框 : 合金黃銅 或中碳鋼 S45C 或不銹鋼 SUS410
 - 鋼珠 : 鉻鉬軸承鋼 SUJ-2 · 熱處理 HRC 56°±2 · 鍍硬鉻
 - 襯墊 (選購): 鐵氟龍銅網 (PTFE)
- 間隙 (mm)
 - 徑向間隙值：小於 0.035
 - 軸向間隙值：小於 0.05

- SELF-LUBRICATING TYPE MATERIALS
- MATERIALS
 - RACE:Copper Alloy or Carbon Steel S45C or Stainless Steel SUS410
 - BALL:Bearing Steel SUJ-2, Heat Treated HRC 56°±2, Hard Chrome Plated
 - LINER(Option): PTFE, Strong & flexible bronze mesh spread with fluorine resin
- CLEARANCE (Unit: mm)
 - Radial Clearance:0.035 or less
 - Axial Clearance:0.05 or less



公制尺寸 / DIMENSIONS IN METRIC mm										
型 號 Model No.	B H7	W +0 -0.1	D h7	O	H + 0 -0.1	R	旋角 α	球徑 Ball Dia. Ø	徑向荷重 Radial S. load (kgf)	重量 Weight (g)
PC 4	4	7	12.0	7.0	4.5	0.5	13	10.32	350	4
PC 5	5	8	13.0	7.7	6.0	0.5	13	11.11	550	6
PC 6	6	9	15.0	8.9	6.7	0.5	13	12.70	650	9
PC 8	8	12	18.0	10.4	9.0	1.0	13	15.88	1150	17
PC 10	10	14	22.0	12.9	10.5	1.0	13	19.05	1650	27
PC 12	12	16	26.0	15.4	12.0	1.0	13	22.23	5500	41
PC 14	14	19	30.0	16.8	14.0	1.5	15	25.40	7020	62
PC 16	16	21	34.0	19.3	15.0	1.5	15	28.58	8850	90
PC 18	18	23	38.0	21.8	17.0	1.5	15	31.75	10830	112
PC 20	20	25	42.0	24.3	18.0	2.0	15	34.93	12840	165
PC 22	22	28	46.0	25.8	20.0	2.0	15	38.10	15600	215
PC 25	25	31	50.0	29.6	22.0	2.0	15	42.85	19450	275


* 註：PC 系列為接單生產 *NOTE: PC Series are made by order.

GE
series

球面軸承
SPHERICAL BEARING



- 簡易型
鋼珠與外框間無襯墊設計，一般狀況均適用
- 材質
·外框及鋼珠：鉻鉬軸承鋼 SUJ-2，熱處理 HRC 56°±2，表面磷酸錳皮膜處理
- ECONOMIC TYPE
Matel to matel. Economic type for general purpose.
- MATERIALS
·RACE & BALL: Bearing Steel SUJ-2, Heat Treated HRC 56°±2, Phosphatizing Treated

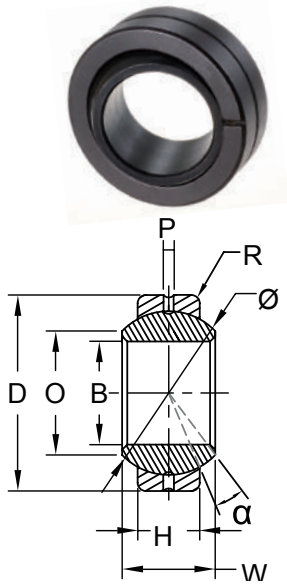

公制尺寸 / DIMENSIONS IN METRIC mm											
型 號 Model No.	B *(1)	W +0 -0.1	D *(1)	O	H +0 -0.1	P	R	旋角 α	球徑 Ball Dia. Ø	徑向荷重 Radial S. load (kgf)	重量 Weight (g)
GE 8	8	8	16.0	10.0	5.0	1.0	1.0	15	12.70	2800	8
GE 10	10	9	19.0	12.0	6.0	1.0	1.5	12	15.88	4100	13
GE 12	12	10	22.0	14.0	7.0	1.0	1.5	10	18.00	5500	16
GE 15	15	12	26.0	18.0	9.0	1.5	2.0	8	22.23	8600	28
GE 17	17	14	30.0	20.0	10.0	1.5	2.0	10	25.40	10800	52
GE 20	20	16	35.0	24.0	12.0	1.5	2.0	8	28.58	14800	70
GE 25	25	20	42.0	29.0	16.0	2.0	3.0	7	36.50	24400	130
GE 30	30	22	47.0	34.0	18.0	2.0	3.0	6	42.85	31600	170
GE 35	35	25	55.0	39.0	20.0	2.0	3.0	6	48.00	40700	250
GE 40	40	28	62.0	45.0	22.0	2.5	4.0	7	54.00	50900	320
GE 45	45	32	68.0	50.0	25.0	2.5	4.0	7	60.00	65200	450
GE 50	50	35	75.0	55.0	28.0	2.5	5.0	6	66.00	79500	555
GE 60	60	44	90.0	66.0	36.0	2.5	5.0	6	80.00	124300	1100


*(1) 尺寸公差請詳附錄公差表 Please refer the tolerance table of index.
* 註：GE 系列為接單生產 *NOTE: GE Series are made by order.

GE.C
series

球面軸承
SPHERICAL BEARING




- 免給油、自潤型
- 材質
·外框：中碳鋼 S45C
·鋼珠：鉻鉬軸承鋼 SUJ-2，熱處理 HRC 56°±2，表面鍍硬鉻
·襯墊：鐵氟龍銅網 (PTFE)- 柔軟堅韌銅網和氟樹脂塗佈組成
- 間隙 (mm)
徑向間隙值：小於 0.035
軸向間隙值：小於 0.05
- SELF-LUBRICATING TYPE MATERIALS
- MATERIALS
·RACE: Medium Carbon Steel S45C
·BALL: Bearing Steel SUJ-2, Heat Treated HRC 56°±2, Hard Chrome Plated
·LINER: PTFE, Strong & flexible bronze mesh spread with fluorine resin
- CLEARANCE (Unit: mm)
Radial Clearance: 0.035 or less
Axial Clearance: 0.05 or less

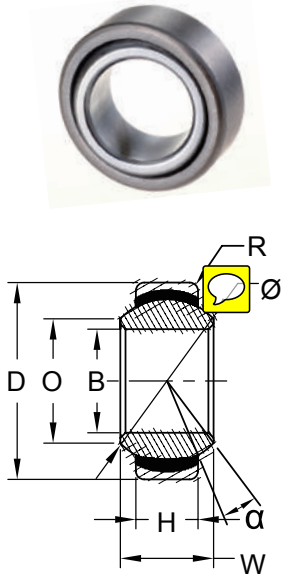

公制尺寸 / DIMENSIONS IN METRIC mm											
型 號 Model No.	B *(1)	W +0 -0.1	D *(1)	O	H + 0 -0.1	P	R	旋角 α	球徑 Ball Dia. Ø	徑向荷重 Radial S. load (kgf)	重量 Weight (g)
GE 8 C	8	8	16.0	10.0	5.0	1.0	1.0	15	12.70	1480	8
GE 10 C	10	9	19.0	12.0	6.0	1.5	1.5	12	15.88	2100	13
GE 12 C	12	10	22.0	14.0	7.0	1.5	1.5	10	18.00	2900	16
GE 15 C	15	12	26.0	18.0	9.0	2.0	2.0	8	22.23	4480	28
GE 17 C	17	14	30.0	20.0	10.0	2.0	2.0	10	25.40	5700	52
GE 20 C	20	16	35.0	24.0	12.0	2.0	2.0	8	28.58	7950	70
GE 25 C	25	20	42.0	29.0	16.0	3.0	3.0	7	36.50	12940	130
GE 30 C	30	22	47.0	34.0	18.0	3.0	3.0	6	42.85	16920	170
GE 35 C	35	25	55.0	39.0	20.0	3.0	3.0	6	48.00	22830	250
GE 40 C	40	28	62.0	45.0	22.0	4.0	4.0	7	54.00	28540	320
GE 45 C	45	32	68.0	50.0	25.0	4.0	4.0	7	60.00	36970	450
GE 50 C	50	35	75.0	55.0	28.0	5.0	5.0	6	66.00	44850	555
GE 60 C	60	44	90.0	66.0	36.0	5.0	5.0	6	80.00	70840	1100



*(1) 尺寸公差請詳附錄公差表 Please refer the tolerance table of index.
* 註：GE.C 系列為接單生產 *NOTE: GE.C Series are made by order.

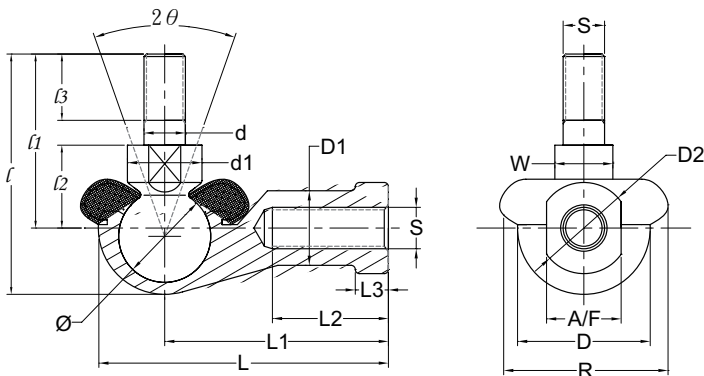

- 材質
·主體：高強度鋅合金
·活動柄：碳鋼·表面鍍鋅 (Cr3+)
·防塵套：特殊合成橡膠·NBR
- 間隙 (mm)
徑向間隙值：0.02~0.06
軸向間隙值：小於 0.3

- MATERIALS
·BODY:High Strength Zinc Alloy
·BALL STUD:Carbon Steel , Zinc Coated (Cr3+)
·BOOT: Special Synthetic Rubber, NBR

- CLEARANCE (Unit: mm)
Radial Clearance:0.02~0.06
Axial Clearance:0.3 or less

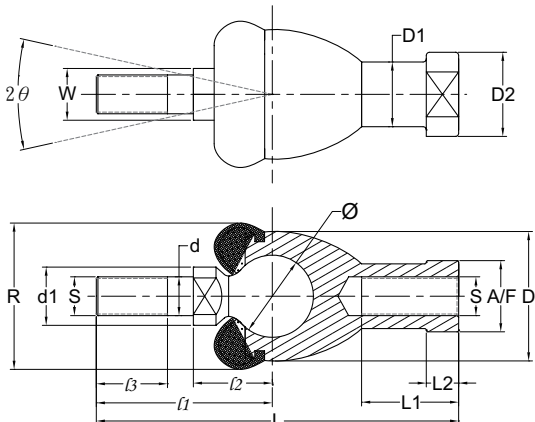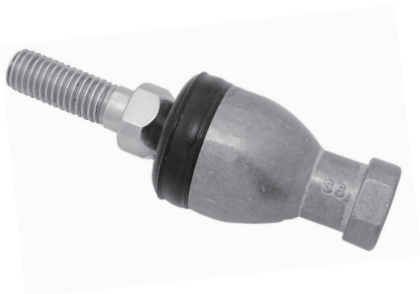

- 材質
·主體：高強度鋅合金
·活動柄：碳鋼·表面鍍鋅 (Cr3+)
·防塵套：特殊合成橡膠·NBR
- 間隙 (mm)
徑向間隙值：0.02~0.06
軸向間隙值：小於 0.3

- MATERIALS
·BODY:High Strength Zinc Alloy
·BALL STUD:Carbon Steel , Zinc Coated (Cr3+)
·BOOT: Special Synthetic Rubber, NBR

Table with 19 columns: Model No., Outline Dimensions (L, D, R, S), Body Dimensions (l1, l2, l3, D1, D2, A/F), Ball Stud Dimensions (l1, l2, l3, d, d1, W, Ball Dia.), 2θ, S.Load, Weight. Rows include RBL 5 R/L, RBL 6 R/L, RBL 8 R/L, RBL 10 RF/LF, RBL 10 R/L, RBL 12 RF/LF, RBL 12 R/L, RBL 14 RF/LF, RBL 14 R/L, RBL 16 RF/LF, RBL 16 R/L.

Table with 19 columns: Model No., Outline Dimensions (L, D, R, S), Body Dimensions (l1, l2, D1, D2, A/F), Ball Stud Dimensions (l1, l2, l3, d, d1, W, Ball Dia.), 2θ, S.Load, Weight. Rows include BI 5 R/L, BI 6 R/L, BI 8 R/L, BI 10 RF/LF, BI 10 R/L, BI 12 RF/LF, BI 12 R/L, BI 14 RF/LF, BI 14 R/L, BI 16 RF/LF, BI 16 R/L.

* 註：BI 14~16 系列為接單生產 *NOTE: BI 14~16 Series are made by order.


BL
series

連球軸承
LINK BALL BEARING




YL
series

連球軸承
LINK BALL BEARING

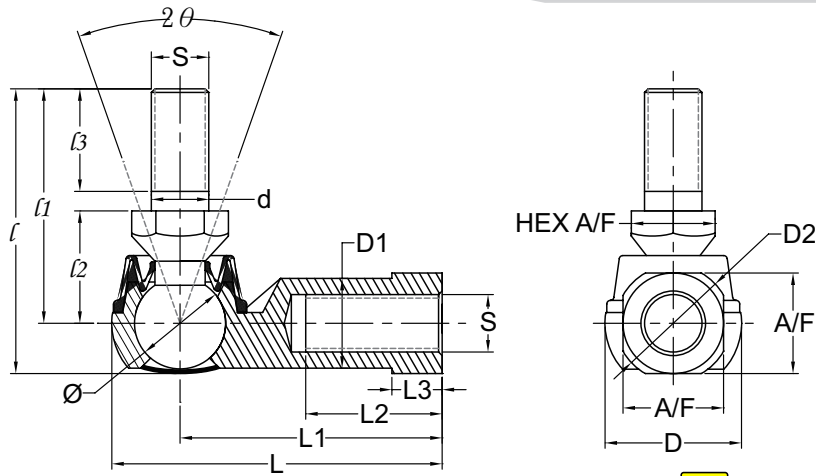

- 材質
·主體：高強度鋅合金
·活動柄：碳鋼，鍍鋅 (Cr3+)
·防塵套：特殊合成橡膠 · NBR
- 間隙 (mm)
徑向間隙值：0.02~0.06
軸向間隙值：小於 0.3
- MATERIALS
·BODY:High Strength Zinc Alloy
·BALL STUD:Carbon Steel, Zinc Coated (Cr3+)
·BOOT: Special Synthetic Rubber, NBR
- CLEARANCE (mm)
Radial Clearance:0.02~0.06
Axial Clearance:0.3 or less

公制尺寸 / DIMENSIONS IN METRIC mm																			
型 號	外型尺寸 Outline Dimensions			螺紋 Thread	主體尺寸 Body Dimensions						活動柄尺寸 Ball Stud Dimensions						旋角	荷重 S.Load	重量 Weight
Model No.	L	D	<i>l</i>	S	<i>l</i> 1	<i>l</i> 2	<i>l</i> 3	D1	D2	A/F +0 -0.3	<i>l</i> 1	<i>l</i> 2	<i>l</i> 3 ±0.3	d -0.05	六角 HEX A/F +0 -0.3	Ball Dia. Ø	2θ	Pk(kgf)	(g)
BL 6 R/L	38	16	32.6	6x1.0	30	16	5	10	13	11	26	11	11	6	10	11.11	40	380	28
BL 8 R/L	45.5	19	38.6	8x1.25	36	19	6	12.5	16	14	31	14	12	8	12	12.7	40	630	48
BL 10 RF/LF	55.5	25	46.3	10x1.25	43	23	7	14.5	19	17	37	17	15	10	14	15.88	40	1090	87
BL 10 R/L	55.5	25	52.3	10x1.5	43	23	7	14.5	19	17	43	17	21	10	14	15.88	40	1090	87
BL 12 RF/LF	65.5	31	53	12x1.25	50	26	8	17.5	22	19	49	19	17	12	17	19.05	40	1400	155
BL 12 R/L	65.5	31	61.5	12x1.75	50	26	8	17.5	22	19	49	19	24	12	17	19.05	40	1400	160

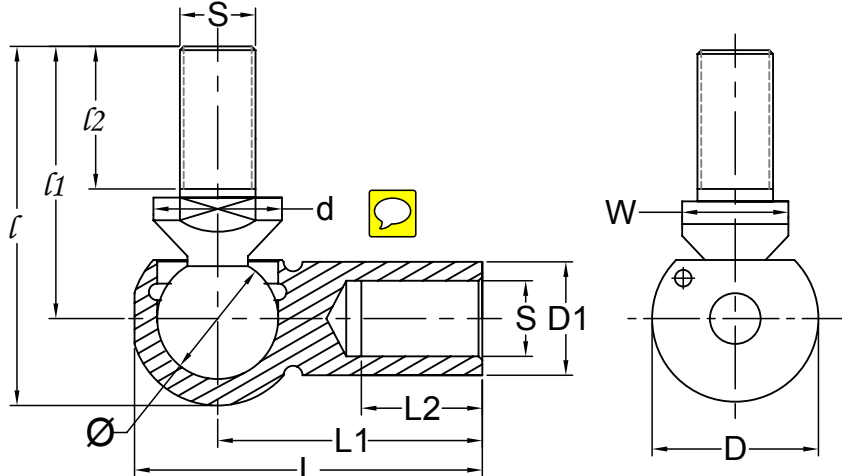

- 材質
·主體：中碳快削鋼 1144 · 表面鍍鉻
·活動柄：中碳鋼 S45C · 表面鍍鉻
·卡 簧：彈簧鋼
- MATERIALS
·BODY:Free Cutting Steel 1144, Chrome Plated
·BALL STUD:Medium Carbon Steel S45C, Chrome Plated
·SPRING: Spring Steel

公制尺寸 / DIMENSIONS IN METRIC mm															型 號 Model No.	外型尺寸 Outline Dimensions			螺紋 Thread	主體尺寸 Body Dimensions			活動柄尺寸 Ball Stud Dimensions					最小拉拔力 Min. Separation Force (kgf)	重量 Weight (g)
																L	D	l		l1	l2	D1	l1 ±0.3	l2	d	W +0 -0.3	Ball Dia. Ø		
YL 5R/L	28	13	29	5x0.8	22	10	8	19	10	8	7	8	3	15															
YL 6R/L	32	15	30.5	6x1.0	25	11.5	10	23.5	12.5	10	8	10	4	25															
YL 8R/L	40	21	38	8x1.25	30.5	14	13	29.5	16.5	13	11	13	6	55															
YL 10 RF/LF	46	24	46.5	10x1.25	35	16	15	36	20	16	14	16	8	104															
YL 10 R/L	46	24	46.5	10x1.5	35	16	15	36	20	16	14	16	8	90															
YL 12 RF/LF	46	24	46.5	12x1.25	35	16	17	36	20	16	14	16	8	104															
YL 12 R/L	46	24	46.5	12x1.75	35	16	17	35	20	16	14	16	8	104															
YL 14 RF/LF	57.5	25	60.5	14x1.5	45	22	19	36	28	20	16	19	10	220															
YL 14 R/L	57.5	25	60.5	14x2.0	45	22	19	48	28	20	16	19	10	220															
YL 16 RF/LF	57.5	25	60.5	16x1.5	45	22	21	48	28	20	16	19	10	220															
YL 16 R/L	57.5	25	60.5	16x2.0	45	22	21	48	28	20	16	19	10	220															

* 註：YL 系列為接單生產 · *NOTE: YL Series are made by order.

FJ

series

浮動接頭軸承 FLOATING JOINT BEARING



OEM


特殊規格客製品 OEM Products



FJ 8 to 10



FJ 12 to 36

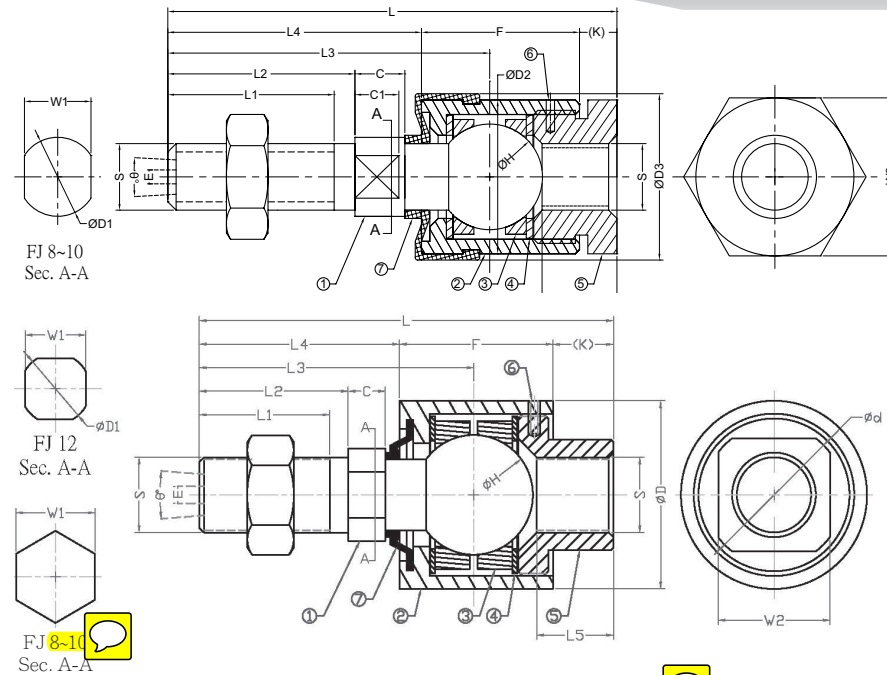

■組成零件

編號	名稱	材料說明
1	球頭牙桿	FJ 8~10: 滲碳鋼珠、中碳鋼 S45C、鍍鋅 FJ 12~36: 合金鋼 SCM415、熱處理、鍍鋅
2	主體外框	中碳鋼 S45C、鍍鋅
3	固定環	軸承鋼 SUJ-2、熱處理、二硫化鉬處理
4	華司	高碳鋼 SK-5、熱處理、二硫化鉬處理
5	後蓋	中碳鋼 S45C、鍍鋅
6	固定梢	
7	防塵蓋	合成橡膠 NBR

No.	Part	Materials & Descriptions
1	Ball stud	FJ 8~10: Steel Ball, Carbon Steel S45C, Zinc Plated FJ 12~36: Alloy Steel SCM415, Heat Treated, Zinc Plate
2	Case	Carbon Steel S45C, Zinc Plated
3	Ring	Bearing Steel SUJ-2, Heat Treated, MoS2 Treated
4	Washer	High Carbon Steel SK-5, Heat Treated, MoS2 Treated
5	Socket	Carbon Steel S45C, Zinc Plated
6	Ping	
7	Boots	Synthetic Rubber NBR

公制尺寸 / DIMENSIONS IN METRIC mm

型號 Model No.	Thread S	L	L1	L2	L3	L4	L5	C	C1	F	K	d	D	D1	D2	D3	W1		W2		ØH	搖動角 θ	偏擺量 E	靜負荷 容KN
FJ 08	8x1.25	54	20	22.5	38.7	30.5	9	6	4.5	19	4.5	-	-	9.5	18.5	20	8	0 -0.25	19	0 -0.35	12.7	10	1	9.02
FJ 10	10x1.25	63	24.5	44	34	11.2	6	4.5	24	5	-	-	12.5	23.5	25	10	0 -0.25	24	0 -0.35	15.875	10	2	12.3	
FJ 12	12x1.25	69.5	20.5	24	46	33	12.9	7	15	21.5	9	24	32	-	-	-	13	0 -0.25	19	0 -0.35	19.05	10	2	19.1
FJ 16	16x1.5	89	28	32	59	43	16.3	8	-	33	13	30	40	-	-	-	17	0 -0.25	24	0 -0.35	24.5	10	3	36.8
FJ 18	18x1.5	92	31	35	62	46	17.3	8	-	33	13	30	40	-	-	-	17	0 -0.25	24	0 -0.35	24.5	10	3	36.8
FJ 20	20x1.5	110	35	40	72	53	20.8	9	-	42	15	38	50	-	-	-	22	0 -0.35	30	0 -0.35	31.75	10	4	57.3
FJ 24	24x1.5	129.5	41	46	86	62	25.5	12	-	49	18.5	48	64	-	-	-	24	0 -0.35	36	0 -0.35	38	10	5	82.8
FJ 24B	24x2.0	129.5	41	46	86	62	25.5	12	-	49	18.5	48	64	-	-	-	24	0 -0.35	36	0 -0.35	38	10	5	82.8
FJ 27	27x2.0	158	47	54	102	74.5	34.5	14	-	62	21.5	60	76	-	-	-	32	0 -0.4	46	0 -0.4	48	10	5	132
FJ 30	30x1.5	162	52	58	106	78.5	34.5	14	-	62	21.5	60	76	-	-	-	32	0 -0.4	46	0 -0.4	48	10	5	132
FJ 30B	30x2.0	162	52	58	106	78.5	34.5	14	-	62	21.5	60	76	-	-	-	32	0 -0.4	46	0 -0.4	48	10	5	132
FJ 36T	36x2.0	200	64	72	129	96	44.5	18	-	80	24	70	88	-	-	-	36	0 -0.4	55	0 -0.4	55	10	6	194

* 註：FJ 系列為接單生產 *NOTE: FJ Series are made by order.

特殊規格客製品 / OEM PRODUCTS

我們可為客戶生產特殊規格之客製品，以滿足您的需求。

We produce OEM products in any sizes, shapes and structures to suit your needs.



特殊規格客製品 / OEM PRODUCTS

我們可為客戶生產特殊規格之客製品，以滿足您的需求。
We do OEM products (in any size, shape and structure) to meet your needs.



用轉換因子 CONVERSION FACTORS

英吋 (Inch)X 25.4= 公釐 (mm)	公釐 (mm)X 0.03937= 英吋 (inch)
公斤 (Kgf)X 2.2046= 英磅 (Lbs)	公斤 (Kgf)X 9.81= 牛頓 (Newtons)
英磅 (Lbs)X 0.4536= 公斤 (Kgf)	英磅 (Lbs)X 4.448= 牛頓 (Newtons)
牛頓 (Newtons)X 0.2248= 英磅 (Lbs)	

孔徑誤差表 (ISO 286-2), H7 / ISO Tolerances for Holes (ISO 286-2), H7

常用孔徑 / Nominal hole sizes (B mm)							
大於 Over	3	6	10	18	30	40	50
小於 Inc.	6	10	18	30	40	50	65
公差 Δ Bmp (μ m)							
H7	12	15	18	21	25	30	
	0	0	0	0	0	0	0

ISO 外徑誤差表 (ISO 286-2), h7 / ISO Tolerances for Shaft (ISO 286-2), h7

常用外徑 / Nominal shaft sizes (D mm)							
大於 Over	3	6	10	18	30	40	50
小於 Inc.	6	10	18	30	40	50	65
公差 Δ Dmp (μ m)							
h7	0	0	0	0	0	0	0
	-12	-15	-18	-21	-25	-30	

桿端軸承及球面軸承內圓誤差表 - SI_E, SA_E, SI_T, SA_T 系列 - GE, GE_C 系列

Tolerances of inner ring for rod end bearings (SI_E, SA_E, SI_T, SA_T Series) and spherical bearings (GE, GE_C Series)

內圓 Inner ring (B mm)				
大於 Over	-	18	30	50
小於 Inc.	18	30	50	80
公差 Δ Bmp (μ m)				
Max.	0	0	0	0
Min.	-8	-10	-12	-15

軸承外框誤差表 - GE, GE_C 系列

Tolerances of outer ring for spherical bearings (GE, GE_C Series)

外框 Outer ring (D mm)					
大於 Over	-	18	30	50	80
小於 Inc.	18	30	50	80	120
公差 Δ Dmp (μ m)					
Max.	0	0	0	0	0
Min.	-8	-9	-11	-13	-15



www.s-b-bearings.com



唐立軸承企業股份有限公司 STRUENING BEARINGS CO., LTD.

42942 台中市神岡區豐洲科技工業園區堤南路26號
No.26, Tinan Rd. Fongjhou Science Park, Shengang Dist.,
Taichung City 42942, Taiwan

TEL: +886-4- 2515 3990 FAX: +886-4- 2515 3121

sales@s-b-bearings.com



Version 2018