


Button for release & lock function:



**Release**

Switch Right for release, to make the adjustable working as a ratchet wrench.

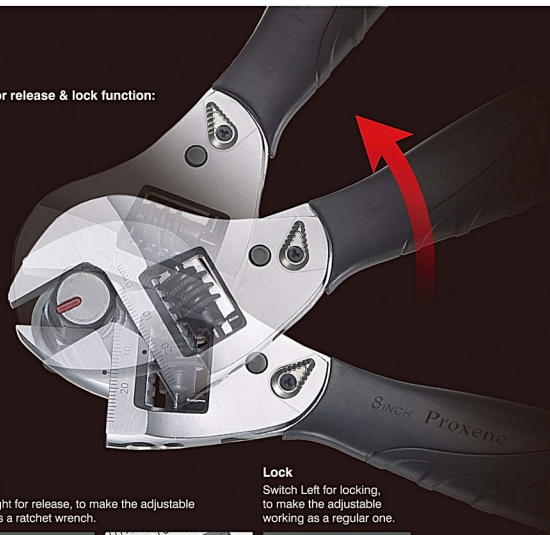

**Lock**

Switch Left for locking, to make the adjustable working as a regular one.



**RW**

**Proxene**  
The one and whole.

**PROXENE TOOLS CO., LTD.**

No.35, Alley 28, Lane 360, Chung Shan Road, Shen kang Dist., Taichung City 42947, Taiwan  
E-mail:p5628308@ms13.hinet.net  
web site:www.proxene.com.tw  
TEL:886-4-25627786-7 FAX:886-4-25628308

Proxene RW Series 2012.02-A-2000



**Proxene**  
The one and whole.


**FasWrench™ II**  
**RW Series**  
RATCHETING ADJUSTABLE WRENCH



**World Patented**

**Proxene**  
The one and whole.

High Torque Performance

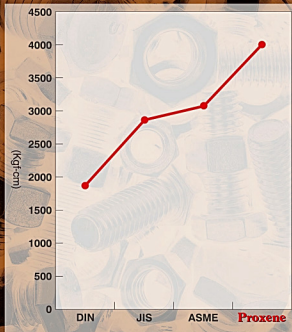

## RW Series


Chrome vanadium, exceeding international standards as ISO 6787-1982, ASME B.107.8-2010, BS 6333-1995, Din 3117-1988, JIS B4604-1976 Heavy Duty, SABS 1211-1984 Heavy Duty, CNS, etc.

### Features : 6 S

- Sanction:** World Patented
- Saliency:** Wider jaw Opening, Comfortable & Durability
- Superb:** Capable of both Ratcheting and Regular usage
- Simple:** Ratcheting or Regular function at a switch away
- Smooth:** Precision, excellent in each movement of Knurl
- Security:** Tension enhanced, high torque  $\uparrow$  130% of ASME

### Magic Button

- Right:** Working as **ratchet**
- Left:** For **Regular** use



Size Inch(mm)	Standard Jaw Opening Width(mm)	Our Wider Maximum Jaw Opening Not Less Than(mm)	Fastener Range For			Load Bending ANSI Approved Min.(kg-cm)
			Metric Hexagon Nut's Size	See Hexagon Nut's Size		
6" (150mm)	20	23.9	M1-M16	W1/8-W1/2	1674	
8" (200mm)	24	28.6	M1-M18	W1/8-W5/8	3117	
10" (250mm)	29	32.8	M1-M22	W1/8-W3/4	5195	

Ergonomic handle design provides warmth and friendly to the end-users



Wider jaw opening

